

Reference manual

version 2.2.0

Y:A:D:I:F:A

Yet Another DNS Implementation For All

Contents

1	Introduction	9
1.1	Domain Name System	10
1.1.1	Zones	10
1.1.2	Authoritative name servers	11
2	Resource Requirements	13
2.1	Hardware	13
2.1.1	CPU	13
2.1.2	Memory	13
2.2	Supported Operating Systems	13
3	Installation	15
3.1	Server	15
3.2	Client	15
3.3	Libraries	15
3.4	From Sources	16
3.4.1	Configure Options	16
3.4.2	Server installation	18

3.5	From Packages	19
3.5.1	RHEL/CentOS/Fedora	19
3.5.2	Debian	20
3.5.3	Ubuntu	20
3.5.4	Arch Linux	21
3.5.5	Gentoo	22
3.5.6	FreeBSD	22
3.5.7	OpenBSD	23
3.5.8	Solaris	23
3.5.9	Mac OS X	23
4	Server Configuration	24
4.1	An authoritative name server	25
4.1.1	Primary name server	25
4.1.2	Secondary name server	26
4.2	Signals	26
5	Server Technical	28
5.1	Zone file reader	28
5.1.1	Known types	29
6	Client	30
6.1	YADIFA	30
6.1.1	Commands	31
7	Domain Name System Security Extensions (DNSSEC)	39

7.1	Introduction	39
7.2	DNSSEC overview	39
7.3	Types of key pairs	41
7.4	Algorithms	41
8	DNSSEC Policies	42
8.1	Introduction	42
8.2	What is needed for DNSSEC?	42
8.2.1	Keys for signing	42
8.2.2	Signed zone	44
8.2.3	Delegated zone	45
8.3	What is needed for yadifa?	45
8.3.1	Zone	46
8.3.2	DNSSEC-Policy	46
8.3.3	Denial	47
8.3.4	Key Suite	49
8.3.5	Key Template	50
8.3.6	Key-roll	51
9	DNS Name Server Identifier (NSID)	54
9.1	Introduction	54
9.2	NSID payload	54
10	DNS Response Rate Limiting (RRL)	56
10.1	Introduction	56

10.2	What is it?	56
10.3	The problem	56
10.4	A solution	57
11	Multi Master	58
11.1	Introduction	58
11.2	What is needed?	59
11.2.1	Zone	59
12	Configuration Reference	60
12.1	Layout	60
12.2	Types	62
12.3	Sections	63
12.3.1	< <i>main</i> > section	63
12.3.2	< <i>zone</i> > sections	68
12.3.3	< <i>key</i> > sections	70
12.3.4	< <i>acl</i> > section	71
12.3.5	< <i>channels</i> > section	73
12.3.6	< <i>loggers</i> > section	76
12.3.7	< <i>nsid</i> > section	79
12.3.8	< <i>rrl</i> > section	80
12.3.9	< <i>dnssec-policy</i> > section	81
12.3.10	< <i>key-suite</i> > section	82
12.3.11	< <i>key-roll</i> > section	83
12.3.12	< <i>key-template</i> > section	84

12.3.13 <denial> section	85
13 Zones	86
13.1 MACROS	86
13.1.1 @	87
13.1.2 \$TTL	87
13.1.3 \$ORIGIN	88
13.2 Classes	89
13.3 Resource record types	89
14 Journal	92
15 Statistics	94
16 Configuration Examples	97
16.1 Introduction	97
16.2 YADIFA as a primary name server	98
16.2.1 The One That is Really Easy	98
16.2.2 The One With Activation of Logging	99
16.2.3 The One With NSID	101
16.2.4 The One With RRL	102
16.2.5 The One With DNSSEC Policy 'diary' style	104
16.2.6 The One With DNSSEC Policy 'relative' style	106
16.2.7 The One With the Controller	108
16.3 YADIFA as a secondary name server	110
16.3.1 The One With One Master	110

16.3.2	The One With Several Masters	111
16.3.3	The One With Activation of Logging	112
16.3.4	The One With NSID	114
16.3.5	The One With RRL	115
17	Troubleshooting	117
17.1	Submitting a bug report	117
17.2	Stacktrace	120
17.2.1	Using a core dump	121
17.2.2	Running yadifad in the debugger	122
17.3	Building yadifad with even more debugging information	123
	Bibliography	124

List of Figures

1.1	DNS hierarchy	11
16.1	primary name server (simple configuration)	98
16.2	primary name server with logging	99
16.3	primary name server with NSID	101
16.4	primary name server with RRL	102
16.5	primary name server (DNSSEC policy 'diary' style)	104
16.6	primary name server (DNSSEC policy 'relative' style)	106
16.7	primary name server with controller	108
16.8	secondary name server (one master)	110
16.9	secondary name server (several masters)	111
16.10	secondary name server with logging	112
16.11	secondary name server with NSID	114
16.12	secondary name server with RRL	115



1 INTRODUCTION

YADIFA is a *name server* implementation developed by **EURid vzw/absl** (EURID), the registry for the *.eu* top-level domain. EURID developed *YADIFA* to increase the robustness of the *.eu* name server infrastructure by adding a stable alternative to the other name server implementations in use.

In a nutshell, *YADIFA* :

- is an authoritative name server, in both a master and slave configuration
- is **RFC** compliant
- is portable across multiple Operating Systems including GNU/Linux, BSD and OSX
- is written from scratch in C. It is a clean implementation, which uses the OpenSSL library.
- supports *EDNS0*[55] (*EDNS0*)
- supports *Domain Name System Security Extensions*[47] (*DNSSEC*) with *NSEC*[48] (*NSEC*) and *NSEC3*[12] (*NSEC3*)
- has full and incremental zone transfer handling (*AXFR*[55] (*AXFR*) and *IXFR*[43] (*IXFR*)).
- *DNSSEC* signing service

The secondary design goals for *YADIFA* are to:

- be a caching name server
- be a validating name server
- have a backend which is Structured Query Language (SQL)-based¹
- allow dynamic zone updates

¹ *YADIFA* will read zone from files and SQL-based backends

In future releases new features will be added:

- recursion
- caching
- validation
- split horizon
- plug-in system to integrate with EURID's proprietary systems
- dynamic provisioning of new domain names

1.1 Domain Name System

The *Domain Name System*[42] (*DNS*) is a system and network protocol used on the Internet. *DNS* is a globally distributed database with domain names, which can translate those domain names into IP addresses and vice versa. All Internet-connected systems (routers, switches, desktops, laptops, servers, etc.) use *DNS* to query *DNS* servers for a IP addresses.

DNS is used by most services on the Internet. Mail, which itself uses the SMTP-protocol, uses *DNS* to get information about where to send emails.

DNS is an hierarchical, distributed system (see figure 1.1). One *DNS* server cannot hold all the information.

If you want to surf to <http://www.eurid.eu> for example, your computer needs the IP address of *www.eurid.eu*.

It first asks to the *root* name servers which guide you to the *.eu* name servers, which in turn guides you to the EURID name servers, where you will get the IP address of *www.eurid.eu*.

1.1.1 Zones

The information about a domain name can be found in **zones**. In these **zones** you will not only find a website's IP address, eg. *www.eurid.eu*, or a mail server's IP address, but also the information that points you to a subsection of the **zone**.

To clarify:

To find the IP address of *www.eurid.eu*, you start your search at the *root* server. You are not given the website's IP address, but are pointed in the direction where you will be able to find the information. The *root* server points you to a subsection of its zone, it points you to the name server(s) of *.eu*. This we call a *delegation*. The **zone** information has a *Name Server*[42] (*NS*) resource record (*RR*) which contains the names of the *.eu* name servers. In the *.eu* zone information

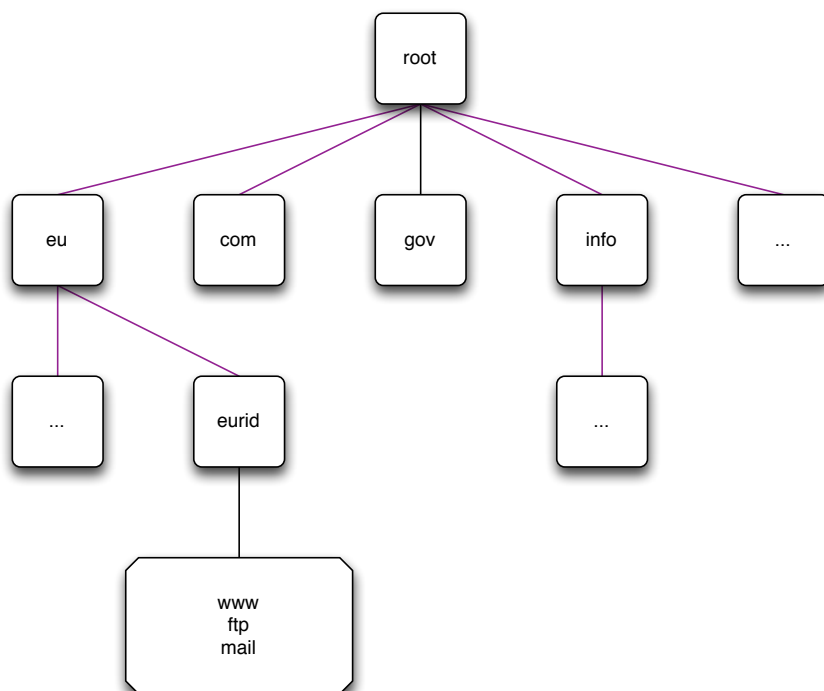


Figure 1.1: DNS hierarchy

you will still not find the IP address of the *www.eurid.eu* website, but you will find the **delegation** to the next domain name, *eurid.eu*. In the name servers of *eurid.eu* you will find in the zone information, including the IP address of *www.eurid.eu*.

1.1.2 Authoritative name servers

Name servers with all the information for a particular zone are the *authoritative name servers* for that zone. When querying the information of a domain name with an **authoritative** name server, the name server will give not only the answer, but will also indicate that it is **authoritative** for the information it has provided, by sending an **Authoritative Answer** flag along with the result.

For redundancy purposes a zone does not have only one authoritative name server. Good practice is to have a second and/or third name server in a different sub network.

Primary name server

Only one name server has the original zone information. Most name servers have this kind of information in a text file, also known as a **zone file**. Which authoritative name server is the *primary name server* of a domain name can be found in the *Start Of Authority (SOA) RR*. This information can be obtained from any of the domain name's authoritative name server(s).

Sometimes a *primary name server* is called **master name server**.

Secondary name server

The **secondary name server** has the same information as the *primary name server*, but differs in that it does not have the original *zone file*. A **secondary name server** receives its initial information from a transfer of the *primary name server*. There are several techniques for getting this information.

Sometimes a *secondary name server* is called **slave name server**.



RESOURCE REQUIREMENTS

2.1 Hardware

2.1.1 CPU

The Central Processing Unit (CPU) must be able to handle 64-bit integers (natively or through the compiler). It has to run a memory model where the data pointer size must be equal to the code pointer size. Threading is also required.

2.1.2 Memory

One record takes about 135 bytes of memory. Enabling *DNSSEC* is more expensive and triples that value. At runtime, zone management and processing may require additional storage space, up to 150% of the zone file size.

2.2 Supported Operating Systems

Please find below a list of operating systems and architectures we support and which are known to work.

OS	x86_64	x86_32	ppc64	sparc
Redhat/CentOS 6+	Y	Y	Unknown	-
Fedora 19+	Y	Y	Unknown	-
Arch	Y	Y	-	-
Ubuntu	Y	Y	-	-
Debian	Y	Y	Y	Unknown
YellowDog	-	-	Y	-
FreeBSD	Y	Y	Unknown	Unknown
OpenBSD	Y	Y	Unknown	Unknown
OSX (10.9.4)	Y	-	-	-
Solaris 10	Y	Unknown	-	Y
Windows	Planned	Planned	-	-

SUPPORTED OSes

YADIFA has been compiled with GCC 4.9.1 64 bit on Solaris and OSX. Other Unix flavours (e.g. NetBSD) and Windows support are planned.

The architecture of *YADIFA* is very portable and will run on most flavours of GNU/Linux (e.g. OpenSUSE, Gentoo, Slackware,...) but these configurations are untested.

3 INSTALLATION

The current version of *YADIFA* is: 2.2.0

YADIFA is a collection of one daemon, *yadifad*; one client, *yadifa*; four libraries; four man pages, *yadifad.8*, *yadifa.8*, *yadifa.rc.5* and *yadifad.conf.5*; and example configuration files.

3.1 Server

- A daemon *yadifad*
- A man page *yadifad.8*
- A man page *yadifad.conf.5*
- A *yadifad.conf.example* file.

3.2 Client

- A remote access tool *yadifa* for the server *yadifad*
- A name server lookup tool *yadifa*
- A man page for *yadifa* *yadifa.8*
- A man page *yadifa.rc.5*.

3.3 Libraries

- *dnscore*
- *dnsdb*
- *dnszone*
- *dnslg*.

3.4 From Sources

Everything can be installed in a GNU fashion with *configure*, *make* and *make install*.

YADIFA is tested with:

- GCC 4.6 and GCC 6.1.1
- CLANG 3.8.0
- ICC 12.1.3.

If you want to compile *YADIFA* for a certain compiler you need to add the “CC” environmental variable:

There are compiler optimisation issues with GCC prior to version 4.6. *YADIFA* will compile and work with older GCC versions, provided that the code is compiled without any optimisation (use the flags `-O0`).

```
shell
```

```
$ ./configure CC=gcc-4.6
```

or

```
shell
```

```
$ ./configure CC=clang
```

or

```
shell
```

```
$ ./configure CC=icc
```

3.4.1 Configure Options

You can configure *YADIFA* with several options, the most notable options available:

Functionality

OPTION	DESCRIPTION
-enable-shared	build shared libraries [default=no]
-enable-static	build static libraries [default=yes]
-disable-rrl	Disable DNS Response Rate Limiter
-enable-messages	Enable use messages instead of send (needed if you use more than one IP aliased on the same network interface)
-disable-master	Disable DNS master
-enable-ctrl	Enable remote control
-disable-nsid	Disable NSID support
-disable-acl	Disable ACL support
-disable-tsig	Disable TSIG support
-disable-dynupdate	Disable dynamic update support
-disable-rrsig-management	Disable RRSIG verification and generation for zones
-enable-non-aa-axfr-support	Enable Allows AXFR answer from master without AA bit set (Microsoft DNS)
-enable-lto	Enable LTO support, requires gold linker
-without-tools	build "build without the DNS tools"
-disable-zalloc	Disable zalloc memory system
-enable-log-thread-id	Enable write the thread id in each line of log
-enable-log-pid	Enable write the pid in each line of log
-enable-full-ascii7	Enable YADIFA will now accept ASCII7 characters in DNS names (not recommended)

CONFIGURE OPTIONS

Location

OPTION	DESCRIPTION
-prefix=PREFIX	install architecture-independent files in PREFIX [/usr/local]
-exec-prefix=EPREFIX	install architecture-dependent files in EPREFIX [PREFIX]
-bindir=DIR	user executables [EPREFIX/bin]
-sbindir=DIR	system admin executables [EPREFIX/sbin]
-sysconfdir=DIR	read-only single-machine data [PREFIX/etc]
-localstatedir=DIR	modifiable single-machine data [PREFIX/var]
-libdir=DIR	object code libraries [EPREFIX/lib]
-includedir=DIR	C header files [PREFIX/include]
-datarootdir=DIR	read-only arch.-independent data root [PREFIX/share]
-mandir=DIR	man documentation [DATAROOTDIR/man]
-docdir=DIR	documentation root [DATAROOTDIR/doc/yadifa]

CONFIGURE OPTIONS

3.4.2 Server installation

When installing *YADIFA* in `/opt/`, the `install_prefix` needs to be set to `/opt/`

```
shell
```

```
$ install_prefix='/opt/'  
  
$ tar zxvf yadifa-2.2.0-xxxx.tar.gz  
$ cd yadifa-2.2.0-xxxx  
  
$ ./configure --prefix=${install_prefix}/yadifa/  
$ make  
$ sudo make install
```

After the installation a tree structure with files will have been created:

```
${install_prefix}/bin/  
${install_prefix}/etc/  
${install_prefix}/include/dnscore/  
${install_prefix}/include/dnsdb/  
${install_prefix}/include/dnslg/  
${install_prefix}/include/dnszone/  
${install_prefix}/lib/  
${install_prefix}/sbin/  
${install_prefix}/share/man/man5/  
${install_prefix}/share/man/man8/  
${install_prefix}/share/doc/yadifa  
${install_prefix}/var/log/  
${install_prefix}/var/run/  
${install_prefix}/var/zones/keys/  
${install_prefix}/var/zones/masters/  
${install_prefix}/var/zones/slaves/  
${install_prefix}/var/zones/xfr/
```

The most important files are found in:

```
${install_prefix}/etc/yadifad.conf  
${install_prefix}/bin/yadifa  
${install_prefix}/sbin/yadifad  
${install_prefix}/share/man/man5/yadifa.rc.5  
${install_prefix}/share/man/man5/yadifad.conf.5  
${install_prefix}/share/man/man8/yadifa.8  
${install_prefix}/share/man/man8/yadifad.8
```

Depending on the manner of compilation you will find the libraries in:

```
${install_prefix}/lib/
```

and the include files in:

```
${install_prefix}/include/dnscore/  
${install_prefix}/include/dnsdb/  
${install_prefix}/include/dnslg/  
${install_prefix}/include/dnszone/
```

3.5 From Packages

3.5.1 RHEL/CentOS/Fedora

YADIFA source and binary packages are available from EPEL (Extra Packages for Enterprise Linux), provided by Denis Fateyev. For the latest status, please check : [Fedora Status Page](#)

Preparation

We would like to refer you to the proper installation guide at <https://fedoraproject.org/wiki/EPEL>

- RHEL5/CentOS5 : `yum install http://nl.mirror.eurid.eu/epel/5/i386/epel-release-5-4.noarch.rpm`
- RHEL6/CentOS6 : `yum install http://nl.mirror.eurid.eu/epel/6/i386/epel-release-6-8.noarch.rpm`
- RHEL7/CentOS7 : `yum install http://nl.mirror.eurid.eu/epel/7/x86_64/e/epel-release-7-2.noarch.rpm`
- Fedora19+ : No special action required.

Installation

Once the repositories are setup, installation can be completed using the following command:

```
shell  
$ sudo yum install yadifa
```

3.5.2 Debian

Preparation

When using Debian STABLE, the package is not in the official stable repository and needs to be built manually.

```
shell
```

```
$ sudo apt-get install build-essential dh-autoreconf dh-systemd
$ curl https://github.com/asciiproduct/yadifa/archive/master.zip -o master.zip
$ unzip master.zip
$ curl http://yadifa.eu/r/yadifa-2.1.6-5826.tar.gz -o yadifa_2.1.6.orig.tar.gz
$ cd yadifa-master
$ dpkg-buildpackage -us -uc
$ cd -
```

The packages are now available as `yadifa_<mainver>-<revision>-<architecture>.deb`

Installation

```
shell
```

```
$ sudo groupadd yadifa
$ sudo dpkg -i yadifa_2.1.6-1_*.deb
```

When using Debian testing, version 2.1.6 is available through the official repositories.

```
shell
```

```
$ sudo apt-get install yadifa
```

3.5.3 Ubuntu

Preparation

The package is available through the official repository since Xenial Xerus (16.04 LTS)

```
shell
```

```
$ sudo apt-get install yadifa
```

For older versions of Ubuntu, the package is not in the official repository and needs to be built manually.

```
shell
```

```
$ sudo apt-get install build-essential dh-autoreconf dh-systemd
$ wget https://github.com/asciiproduct/yadifa/archive/master.zip
$ unzip master.zip
$ curl http://yadifa.eu/r/yadifa-2.1.6-5826.tar.gz -o yadifa_2.1.6.orig.tar.gz
$ cd yadifa-master
$ dpkg-buildpackage -us -uc
$ cd -
```

The packages are now available as `yadifa-<mainver>-<revision>-<architecture>.deb`

Installation

```
shell
```

```
$ sudo groupadd yadifa
$ sudo dpkg -i yadifa_2.1.6-1_*.deb
```

3.5.4 Arch Linux

YADIFA is available from AUR (Arch User Repository), provided by BlackIkeEagle.

Preparation

You are encouraged to read aur.archlinux.org for a full description on how to use AUR (Arch User Repository).

The package is available at **Yadifa AUR**

```
shell
```

```
$ curl https://aur.archlinux.org/packages/ya/yadifa/yadifa.tar.gz \  
    -o yadifa.tar.gz  
$ tar zxvf yadifa.tar.gz  
$ cd yadifa  
$ makepkg
```

Installation

Once the repositories are setup, installation can be completed using the following command:

```
shell
```

```
$ sudo pacman -U yadifa-2.1.6-1-x86_64.pkg.tar.xz
```

Or when you have installed pacaaur, the preparation step can be skipped.

```
shell
```

```
$ sudo pacaaur -S yadifa
```

3.5.5 Gentoo

Currently there is no emerge package available for Gentoo.

Please follow the source install option.

3.5.6 FreeBSD

YADIFA is available from FreeBSD ports

Installation

```
shell
```

```
# cd /usr/ports/dns/yadifa && make install clean  
# pkg install dns/yadifa
```

YADIFA is now installed in /usr/local

3.5.7 OpenBSD

Currently there are no packages or ports available for OpenBSD.

Please follow the source install option.

3.5.8 Solaris

There are no packages available for Solaris.

Please follow the source install option.

3.5.9 Mac OS X

Currently there is no Mac OS X package available.

Please use the source install.



SERVER CONFIGURATION

YADIFA is an authoritative name server only. Currently it does not have the functionalities to be a *caching name server*, a *validating name server* or a *forwarder*.

YADIFA can start up without prior configuration, it just needs an empty configuration file. Of course with an empty configuration file it does not do much, but you can test certain functionalities. It will answer queries, but with no zones configured it will return a flag which indicates that the query has been refused (*REFUSED*). This flag will be explained later in the manual.

All logs will be sent to the standard output.

The *YADIFA* configuration file has thirteen sections:

Eight standard sections:

- “*main*” section (see on page 63) (<*main*>)
- “*zone*” section (see on page 68) (<*zone*>)
- “*key*” section (see on page 70) (<*key*>)
- “*acl*” section (see on page 71) (<*acl*>)
- “*channels*” section (see on page 73) (<*channels*>)
- “*loggers*” section (see on page 76) (<*loggers*>)
- “*nsid*” section (see on page 79) (<*nsid*>)
- “*rrl*” section (see on page 80) (<*rrl*>)

And five sections for DNSSEC-Policy (see on page 42) (DNSSEC-Policy) only:

- “*dnssec-policy*” section (see on page 81) (<*dnssec-policy*>)
- “*key-suite*” section (see on page 82) (<*key-suite*>)

- “*key-roll*” section (see on page 83) (<*key-roll*>)
- “*key-template*” section (see on page 84) (<*key-template*>)
- “*denial*” section (see on page 85) (<*denial*>)

Each section has its own set of configuration elements.

- <*main*> contains all the configuration parameters needed to start up *YADIFA*
- <*zone*> contains all the configuration parameters needed for the zones
- <*channels*> and <*loggers*> are needed to configure your log information
- <*key*> contains *TSIG*^[31] (*TSIG*) information
- <*nsid*> contains the “DNS Name Server Identifier Option”
- <*rrl*> contains the “Response Rate Limiting in the Domain Name System”.
- <*dnssec-policy*> (see chapter 8).

4.1 An authoritative name server

To allow *YADIFA* to answer queries for its domain names, you have to declare them to the *zone* section.

4.1.1 Primary name server

An example of a zone with domain name *somedomain.eu*.

configuration example

```
<zone>
  domain      somedomain.eu
  file        masters/somedomain.eu.
  type        master
</zone>
```

Where:

- **domain** is the full qualified domain name
- **file** is the absolute or relative path of the zone file in text format

- **type** is the kind of name server *YADIFA* is for this zone. **type** can be:
 - Master
 - Slave.

In this example, *YADIFA* is configured as a *master*. This means that the original zone file is on this server and you need to edit the zone file on this server.

note

For a working example you can find the zone file on page 86.

4.1.2 Secondary name server

YADIFA is authoritative for the zone *somedomain.eu*, but does not have the original information. *YADIFA* needs to get the information from a *master* for this zone file.

configuration example

```
<zone>
  domain      somedomain.eu
  file        slaves/somedomain.eu.
  type        slave
  master      192.2.0.1
</zone>
```

In this example the **type** changes to *slave*. *YADIFA* needs to know where it can find the master zone file. This will be done with the additional configuration parameter **master**, where you can specify the IP address of the master name server for this domain name.

4.2 Signals

On a unix-like operating systems you can send a *signal* to a process, this is done with the *kill* command.

A few signals are implemented:

- **SIGTERM** will shutdown *YADIFA* properly
- **SIGINT** will shutdown *YADIFA* properly
- **SIGHUP** will reopen the log files and reload all updated zone files from disk. ¹

¹only the zone files with an higher serial number on disk than in the database will be affected

- **SIGUSR1** will save all zone files to disk. Zones files matching the zone in memory will not be overwritten.

For example:

```
shell
```

```
$ ps -ax | grep yadifad  
67071  2  S+      0:03.47  ./yadifad  
$ kill -HUP 67071
```

For now there are three entry points to the database:

1. Zone File
2. *AXFR* and *IXFR*
3. *Dynamic Updates in the Domain Name System*[13] (*DNS UPDATE*).

All three use the same principles to accept a resource record:

- First-come, first-served
- Semantic errors will drop the relevant resource record
- Syntax errors will drop the relevant entity.

Dropping the relevant entity can mean several things. If a syntax error occurs in a *DNS UPDATE* just this packet will be dropped and not the relevant zone file. A syntactical error can be a typo, but for security reasons the entity will be dropped completely.

If a syntax error is not a typo, but something against the **RFCs**, only that resource record will be dropped.

5.1 Zone file reader

The zone file reader will check each resource record as a single entity. Inconsistencies are only checked once the whole zone has been loaded.

What are inconsistencies?

- The apex of a zone file

- Semantics of a resource record
- CNAME's alongside non-cname's
- Non-CNAME's alongside cname's
- Non-existing MACROS/DIRECTIVES (eg.typos in MACROS/DIRECTIVES).

5.1.1 Known types

For more information see section 13.3.

6 CLIENT

YADIFA comes with one client:

1. *yadifa*

6.1 *YADIFA*

yadifa is the tool used to access the *yadifad* servers. *yadifa* can be used to configure a name server and control a name server.

yadifa communicates with the name server over a **Transmission Control Protocol**[45] (TCP) connection. This communication can be authenticated with *TSIG*'s. This *TSIG* can be given via the command line or a configuration file.

If you want to have control support in *YADIFA* you need to enable this function before compiling the sources.

```
shell
```

```
$ ./configure --enable-ctrl
```

After the *configure*, you can do the normal *make* and *make install*.

```
shell
```

```
$ make  
$ make install
```

note

You also need to add allow-control in the *<main>* of *yadifad.conf* (12.3.1).

6.1.1 Commands

TYPES	ARGUMENTS
CFGRELOAD	somedomain.eu
FREEZE	somedomain.eu
LOGREOPEN	
QUERYLOG	-disable , -enable
RELOAD	somedomain.eu
SHUTDOWN	
SYNC	somedomain.eu
UNFREEZE	somedomain.eu
ZONECFGRELOAD	somedomain.eu

COMMANDS

cfgreload

This command will reload all keys, and the zones configurations and the zones. The port can be optionally supplied.

shell example

```
$ yadifa -s "192.0.2.1 port 53" -t CFGRELOAD
```

Gives as result in verbose mode:

shell output

```
;; global options:
;; Got answer:
;; ->>HEADER<<- opcode: CTRL, status: NOERROR, id: 29457
;; flags: qr QUERY: 1, ANSWER: 0, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;.                               CTRL    CFGRELOAD

;; Query time: 4 msec
;; WHEN: Wed May 6 14:24:15 2015
;; MSG SIZE rcvd: 17
```

freeze

This command suspends updates to a zone. No more modification (*DNS UPDATE*) can be done.

shell example

```
$ yadifa -s 192.0.2.1 -t FREEZE -q somedomain.eu
```

Gives as result in verbose mode:

shell output

```
;; global options:
;; Got answer:
;; ->>HEADER<<- opcode: CTRL, status: NOERROR, id: 3507
;; flags: qr QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;.                               CTRL    FREEZE

;; ANSWER SECTION:
.                               0      CTRL    FREEZE  \# 15 A037F6D65646F6D61696
E620565700

;; Query time: 0 msec
;; WHEN: Mon Sep 29 14:55:20 2014
;; MSG SIZE rcvd: 43
```


logreopen

This command reopens all log files.

```
shell example
```

```
$ yadifa -s 192.0.2.1 -t LOGREOPEN
```

Gives as result in verbose mode:

```
shell output
```

```
;; global options:
;; Got answer:
;; ->>HEADER<<- opcode: CTRL, status: NOERROR, id: 12803
;; flags: qr QUERY: 1, ANSWER: 0, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;.                               CTRL    LOGREOPEN

;; Query time: 570 msec
;; WHEN: Wed May 6 14:29:57 2015
;; MSG SIZE rcvd: 17
```

querylog

This command enables or disables query logs.

```
shell example
```

```
$ yadifa -s 192.0.2.1 -t QUERYLOG --enable
```

Gives as result in verbose mode:

shell output

```
;; global options:
;; Got answer:
;; ->>HEADER<<- opcode: CTRL, status: NOERROR, id: 10572
;; flags: qr QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;.                               CTRL    QUERYLOG

;; ANSWER SECTION:
.                               0      CTRL    QUERYLOG  \# 1 31

;; Query time: 1 msec
;; WHEN: Wed May 6 14:30:42 2015
;; MSG SIZE rcvd: 29
```

reload

This command reloads the zone file from disk. If no parameter is given, '.' will be used as domain name.

shell example

```
$ yadifa -s 192.0.2.1 -t RELOAD -q somedomain.eu
```

Gives as result in verbose mode:

shell output

```
;; global options:
;; Got answer:
;; ->>HEADER<<- opcode: ?, status: NOERROR, id: 1750
;; flags: qr QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;.                               CTRL    RELOAD

;; ANSWER SECTION:
.                               0      CTRL    RELOAD  somedomain.eu
E620565700

;; Query time: 1 msec
;; WHEN: Mon Sep 29 15:01:34 2014
;; MSG SIZE rcvd: 43
```

shutdown

This command shutdowns the server.

shell example

```
$ yadifa -s 192.0.2.1 -t SHUTDOWN
```

Gives as result in verbose mode:

shell output

```
;; global options:
;; Got answer:
;; ->>HEADER<<- opcode: CTRL, status: NOTAUTH, id: 57004
;; flags: qr QUERY: 1, ANSWER: 0, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;.                               CTRL    SHUTDOWN

;; Query time: 0 msec
;; WHEN: Mon Sep 29 14:46:50 2014
;; MSG SIZE rcvd: 17
```

sync

This command writes the zone to disk and optionally removes the journal. If no zone is specified, all zones are implied. The extra [-clean] option will remove the journal.

shell example

```
$ yadifa -s 192.0.2.1 -t SYNC -q somedomain.eu --clean
```

Gives as result in verbose mode:

shell output

```
;; global options:
;; Got answer:
;; ->HEADER<<- opcode: CTRL, status: NOERROR, id: 46355
;; flags: qr QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;.                               CTRL    SYNC

;; ANSWER SECTION:
.                               0      CTRL    SYNC    \# 5 A037F6D65646F6D61696
E620565700

;; Query time: 2 msec
;; WHEN: Wed May 6 14:35:27 2015
;; MSG SIZE rcvd: 33
```

unfreeze

This command enables updates to a zone. Modifications (*DNS UPDATE*) can be done again.

shell example

```
$ yadifa -s 192.0.2.1 -t UNFREEZE -q somedomain.eu
```

Gives as result in verbose mode:

shell output

```
;; global options:
;; Got answer:
;; ->>HEADER<<- opcode: CTRL, status: NOERROR, id: 26357
;; flags: qr QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;.                               CTRL      UNFREEZE

;; ANSWER SECTION:
.                               0       CTRL      UNFREEZE  \# 15 A037F6D65646F6D61696
E620565700

;; Query time: 0 msec
;; WHEN: Mon Sep 29 14:56:49 2014
;; MSG SIZE rcvd: 43
```

zonecfgreload

This command rereads the zone config and reloads the zone file from disk.

shell

```
$ yadifa -s 192.0.2.1 -t ZONECFGRELOAD -q somedomain.eu
```

Gives as result:

shell output

```
;; global options:
;; Got answer:
;; ->>HEADER<<- opcode: CTRL, status: NOERROR, id: 49879
;; flags: qr QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 0

;; QUESTION SECTION:
;.                               CTRL    ZONECFGRELOAD

;; ANSWER SECTION:
.                               0      CTRL    ZONECFGRELOAD  \# 15 A037F6D65646F6D6
1696E620565700

;; Query time: 1 msec
;; WHEN: Tue Sep 30 09:39:23 2014
;; MSG SIZE rcvd: 43
```



7 DOMAIN NAME SYSTEM SECURITY EXTENSIONS (DNSSEC)

7.1 Introduction

The *DNS* provides responses without validating their source. This means that it is vulnerable to the insertion of invalid or malicious information, a flaw discovered by Dan Kaminsky in 2008.

This technical report documents the various components of the long-term solution to this kind of cache-poisoning attack: *DNSSEC*.

7.2 DNSSEC overview

In a nutshell, *DNSSEC* adds signatures to regular *DNS* responses in the form of Resource Record Signature (RRSIG) resource records. A signature covers a resource record set. A resource record set properly signed by a trusted source can be accepted as valid. Many signatures can cover the same resource record set.

The RRSIG resource record is consistent in a hash¹ of the covered resource record set along with the validity period and other relevant information, signed with the private part of the owner's key pair².

To be able to verify whether the response is legitimate, the receiver of a signed response should verify that each resource record set is verified by at least one of the signatures that covers it.

If this comparison shows no differences, the receiver is sure of two things:

- Integrity - the response has not been modified
- Authenticity - the response comes from the expected source

¹A hash of a sequence of characters is the result of a one-way transformation of that sequence into a much smaller, fixed-length sequence by applying a certain mathematical formula. The slightest change of the original sequence changes the resulting hash. Thus, after transmission of the characters, one can detect changes to a sequence by comparing its current hash with its original one.

²Public/private key encryption is well-known. A message is signed with the private part of a key pair (kept secret). The resulting signed message can only be verified using the public part of the key pair (shared with everybody).

(the only one to possess the private part of the key pair).

Note that the response itself is not encrypted. *DNSSEC* adds Resource Record Signature[48] (*RRSIG*) records to responses, but the records that hold the data remain unaltered. In this way, *DNSSEC* is backwards compatible as non *DNSSEC*-aware name servers can and should ignore unknown data and continue to function as expected.

The challenge in this scenario is to get the public part of the key pair to the users who need it for verification in a secure way.

The public parts of key pairs are available via the *DNS* as they are published as Domain Name System KEY[48] (*DNSKEY*) resource records. When querying for *DNSKEY* records, the response to a query also holds a signature for the *DNSKEY* record. But the question remains, should the receiver simply accept that the data is authentic and use it?

The answer is no. To verify the signature of a *DNSKEY* record, the user must consult the parent of the domain name. For domain names, such as *eurid.eu*, the parent is the Top Level Domain (*TLD*). For a *TLD*, the parent is the root domain. To enable users to obtain the public part of a signed domain name in a secure way, a hash of the public key is put in the parent zone as a Delegation Signer[48] (*DS*) resource record.

The parent zone signs the *DS* resource record with its keys, authenticating the delegation in the process. In the case of *eurid.eu*, a hash of the public key (*DS*) is put in the *.eu* zone where it is signed with the private key of *.eu*. For the *.eu* zone itself, a hash of the *.eu* public key (*DS*) is put in the root zone, where it is signed with the private key of the root zone.

This means that the receiver can obtain the public part of a key pair by querying for its hash in the parent zone, and verify its signature with the public part of that parent-zone's key pair. This process only takes us up one level in the *DNS* hierarchy.

There the question repeats itself: how can the receiver trust the signature from that parent zone file? The answer lies in applying the same procedure: retrieving the public part of its key, the hash from its parent and the hash's signature.

But ultimately, some trust must be built in.

Herein lies the importance of having a signed Internet root zone, because receivers that verify signatures only need to trust the public key of the root zone. This is the only public key necessary and it can be obtained outside the *DNS*. It is available for download in several different formats together with a signature file at: <http://data.iana.org/root-anchors/>. Before the root zone was signed on 15 July 2010, administrators had to manually configure and maintain public key information from different branches in the *DNS* tree.

Now that the root zone is signed, one can imagine how much effort *TLD* operators are putting into enabling *DNSSEC* on the domains they serve. Only a complete chain of trust allows the secure authentication of a domain name.

7.3 Types of key pairs

Two types of keys are used in *DNSSEC*:

- The Key Signing Key[48] (*KSK*) - used only to sign the hash of *DNSKEY* information
- The Zone Signing Key[48] (*ZSK*) - used to sign the hashes of all resource records (A, NS, MX, etc).

The more signatures generated with a particular key pair, the greater the chance of a successful crypto-attack, in other words deducing the private part of a key pair by using the public part and the available signatures. To prevent the signing of false information, key pairs should not be used indefinitely. Every so often, new key pairs should be generated and used to resign the zone. The frequency of key generation depends on the strength of the algorithm, key length and how often a key is used.

Because strong algorithms and long keys require more resources, such as more CPU, the practice is to use a weaker key pair, the *ZSK*, for all signatures but to change it regularly. Validity of these signatures should be three to six months at most. A stronger key pair, the *KSK*, is only used to sign the public key information. The *KSK* is changed less frequently, every one to two years. Only a hash of the *KSK* appears in the root zone (as the DS record). Since this key is changed, or rolled over, less often, interaction with the parent is less frequent.

7.4 Algorithms

Several algorithms for calculating hashes and signatures have been defined. Specific name server implementations or versions may not support all of the algorithms mentioned in the following summary:

RSASHA1 (algorithm number 5) is declared mandatory by **RFC 4034**[48]. RSASHA1-NSEC3-SHA1 (algorithm number 7) is defined by **RFC 5155**[12]. It is essentially the same algorithm as RSASHA1, although the Next SECure records are NSEC3. The stronger algorithms, RSASHA256 (algorithm number 8) and RSASHA512 (algorithm number 10) are both defined by **RFC 5702**[?].

The use of these latter algorithms is recommended, as attacks against SHA1 (used in algorithms 5 and 7) are increasing. Bear in mind that the newer algorithms, numbers 8 and 10, may not be available in older DNS server implementations and, as verifying DNS name servers that do not recognise an algorithm will treat the data as unsigned. It is unclear at the time of writing whether end users will actually benefit from these stronger algorithms.



DNSSEC POLICIES

8.1 Introduction

The DNS infrastructure is an integral and critical part of the Internet. With that said, the introduction of *DNSSEC* did not make life easier for the hostmaster. Generation of *KSK*'s and *ZSK*'s, in addition to signing the zone using 'salt' and its iterations cause further complexity. To ensure that the keys will not be compromised, new keys must be generated continuously, at regular intervals, in a process called a 'key roll over'. When a key-roll over occurs, it is critical to not lose the integrity of the zone information. At no moment in time is it acceptable to have the zone unsigned or the keys, *KSK* and *ZSK*, outdated.

Due to these complex manipulations, especially on large amounts of zones in a portfolio, there is a need for an overall mechanism to facilitate *DNSSEC* enabled zones. Thanks to *DNSSEC*-policies the administrative overhead and complexity for *DNSSEC* enabled zones can be reduced significantly by generating and activating the keys automatically and maintaining the validity of the signatures.

8.2 What is needed for *DNSSEC*?

To implement *DNSSEC*, the following items are required:

- Keys for signing
- A signed zone
- A delegated zone

8.2.1 Keys for signing

In *DNSSEC*, there are two different types of keys for signing the zone. The *KSK* and *ZSK*. The only difference in both keys is the use.

The *KSK* (Key Signing Key) is used to sign the *DNSKEY* resource record set only and has the Secure Entry Point[48] (*SEP*) bit set. The *ZSK* (Zone Signing Key) is used to sign each resource record set of the zone. It is recommended to use a *KSK* in addition to a *ZSK*. The keysize *KSK* should be larger, resulting in stronger cryptography and therefore can be rolled-over less often.

Each key consists of 2 parts: a private part and a public part.

Private Key

This key is used for signing all the resource record sets. The signatures are stored in the *RRSIG* records and are only valid for a limited amount of time.

The most common format at the moment to store a private key is depicted below:

```
Private-key-format: v1.3
Algorithm: 8 (RSASHA256)
Modulus: ...
PublicExponent: AQAB
PrivateExponent: ...
Prime1: ...
Prime2: ...
Exponent1: ...
Exponent2: ...
Coefficient: ...
Created: <create-date>
Publish: <publish-date>
Activate: <activate-date>
Inactive: <inactive-date>
Delete: <delete-date>
```

The fields; Created, Publish, Activate, Inactivate and Delete; indicate when the key must be used and when it must be removed from the zone.

- Created: Date when the key was created.
- Publish: Date when the public part of the key is published in the zone.
- Activate: Date when the key should start signing the resource record sets.
- Inactivate: Date when the key should stop signing the resource record sets.
- Delete: Date when the public part of the key is removed from the zone.

Public Key

The public (part of the) key is used to verify the signatures generated by the private (part of the) key. The public key is published in the zone as the *DNSKEY*. The only difference between the *KSK* and *ZSK* is the presence of the *SEP* bit, resulting in 257 flags for *KSK* in stead of 256 for a *ZSK*.

```
somedomain.eu. IN DNSKEY 257 3 8 AwE...
```

DS

The *DS* (Delegated Signer) record is the cryptographic glue between the parent and delegated zone. This record needs to be published in the parent zone and corresponds with a *DNSKEY* in the delegated zone.

```
somedomain.eu.      86400   IN  DS  <keytag> 8 2 <hash_of_key>
```

8.2.2 Signed zone

A zone is signed when all the resource record sets are signed by a valid *ZSK*. To be valid, the *ZSK* itself needs to be published as a *DNSKEY* record and is to be signed by a *KSK*, which itself must also be published as a *DNSKEY*. The *KSK* must have a corresponding *DS* record in the parent zone and must in turn be signed by the parent's *ZSK*.

Depending on your preferences and/or requirements, a choice between *NSEC* and *NSEC3* must be made to prove the Denial of Existence.

Signatures

Signatures are generated by the private key and stored in the zone as *RRSIG* records.

```
somedomain.eu.      86400   IN  RRSIG  <type_covered> 8 2 86400 (
                                <end_date> <begin_date> <key_tag> <signer>
                                <signature> )
```

Denial of Existence

DNSSEC requires the cryptographic proof of non-existence. The zone is sorted by the labels and *NSEC* or *NSEC3* records are generated which represent the gaps between two subsequent labels. When a non-existing record is requested, the *NSEC* or *NSEC3* record is returned in between the requested record should have been found. The *NSEC* or *NSEC3* resource records are signed by an *RRSIG*.

For *NSEC*, the non-existence of *somedomain.eu.* would result in a reply similar to:

```
eu. 7200 IN NSEC 0.eu. NS SOA TXT RRSIG NSEC DNSKEY
somedicprod.eu. 7200 IN NSEC somedreams.eu. NS RRSIG NSEC
```

When using *NSEC3*, the mechanism is similar to *NSEC*, but all the records are hashed before being sorted. The hashing algorithm, the salt and the number of times it should be hashed are stored in an *NSEC3PARAM*[12] (*NSEC3PARAM*) record and are copied in each *NSEC3* resource record. In *NSEC3* there is an option to enable the **rfc-optout!** (**rfc-optout!**). When this flag is set, only the zones for which there is a secure delegation will be considered for generating the *NSEC3* records. Non-secure delegations will be treated as non-existent and will reduce the number of *NSEC3* records being created significantly.

```
QBQ65Q60970CPPR0EUCQNSC1FHE073UA.eu. 600 IN NSEC3 1 1 1 5CA1AB1E (
    QBQ60CGMT2JNIJ4JNF2CCRFI4CE4NUEO
    NS SOA RRSIG DNSKEY NSEC3PARAM )
BKP4A7B3BOFKDVMPFABNCJ046PB2911A.eu. 600 IN NSEC3 1 1 1 5CA1AB1E (
    BKPDVHUHA3S2PVTPI58DP5I5SABJUIM4
    NS DS RRSIG )
4EIAT7URLC7FMN9AGIJ231E2S7L62TGO.eu. 600 IN NSEC3 1 1 1 5CA1AB1E (
    4EIOQGMMDBOBP76VHHBDNVEN2UUNABGK
    NS DS RRSIG )
```

8.2.3 Delegated zone

For *DNSSEC* to work, the whole chain up to the root must support *DNSSEC*. If the parent zone does not support *DNSSEC*, the chain cannot be verified and will not work.

8.3 What is needed for yadifa?

As there are a number of parameters to define, the components of *DNSSEC* policies span the following sections:

- `<zone>`
- `<dnssec-policy>`
- `<denial>`
- `<key-suite>`
- `<key-template>`
- `<key-roll>`

8.3.1 Zone

Any zone can be handled by *DNSSEC* policies.

If a zone is activated to handle *DNSSEC* by DNSSEC-policy, the keyword **dnssec-policy** with an associated **id** must be added.

configuration example of `<zone>` with `dnssec-policy`

```
<zone>
  domain      somedomain.eu
  file        masters/somedomain.eu.
  type        master

  dnssec-policy "dp-1"
</zone>
```

8.3.2 DNSSEC-Policy

A DNSSEC-Policy configured zone needs `<dnssec-policy>` which has several keywords:

- **id**
- **denial**
- **key-suite**

configuration example of `<dnssec-policy>` with *NSEC3*

```
<dnssec-policy>
  # name of the 'dnssec-policy'
  id                "dp-1"

  denial            "nsec3-denial"

  # at least one: key-descriptor "name"
  # they define KSK & ZSK keys

  key-suite         "zsk-1024"
  key-suite         "ksk-2048"
</dnssec-policy>
```

At least one `<key-suite>` must be configured. It is also recommended to have one *KSK* and one *ZSK*. *YADIFA* will only read the first four **key-suites**.

The argument of **key-suite** is a string that must be unique per section type. It is possible, however, to configure several different sections with the same name (*id*). For example, in one configuration it is possible to have a `<denial>` and a `<key-suite>` with the same “*id*”.

If `<dnssec-policy>` contains two or more **key-suites** that contain the same content, only one `<key-suite>` will be applied.

note

Clarifying the same content:

If two `<key-suite>` have the same definition about keys in addition to the same time schedule regardless of their names (*ids*), only one will be applied while the other is silently ignored.

8.3.3 Denial

The `<denial>` section contains several keywords:

- **id**
- **salt**¹
- **salt-length**¹
- **iterations**

¹mutually exclusive, if both are defined, the system will refuse to start due to a parsing error

- **optout**

The zone can be signed with *NSEC* or *NSEC3*. If *NSEC3* has been chosen, salt will still need to be used for the *NSEC3PARAM* and the amount of iterations of this salt. In addition, the digest algorithm is also needed and is fixed to SHA1. This cannot be changed.

The choice between *NSEC* or *NSEC3* is done in the `<dnssec-policy>`.

Here are two examples:

- An example with the use of *NSEC*

```
configuration example of <dnssec-policy> with NSEC

<dnssec-policy>
  id          "dp-1"

  denial      "nsec"
  ...
  ...
</dnssec-policy>
```

- An example with the use of *NSEC3*

```
configuration example of <dnssec-policy> with NSEC3

<dnssec-policy>
  id          "dp-2"

  denial      "nsec3"
  ...
  ...
</dnssec-policy>
```

With the latter, "dp-2", there is still a need for `<denial>`. In `<denial>` you need to add a "salt" which can be blank. The algorithm used for the hashing of the *NSEC3 RR* is always SHA1 and cannot be changed. The parameters that can be set are: "iterations", which is the amount of iteration done; the salt which can be set with the mutually exclusive: "salt" or "salt-length"; and "optout" to enable or disable the opt-out feature of *NSEC3*. When the opt-out feature is enabled, *RRSIGs* for insecure delegations are not generated, resulting in smaller zones while maintaining the security for secure delegations.

salt is used as keyword with argument a string. This string is *BASE16*^[34] (*BASE16*) and is the actual salt. The keyword **salt-length** will generate a random string with the length provided as argument.

configuration example of `<denial>` with keyword salt

```
<denial>
  id          "nsec3"

  salt        "BA53BA11"
# salt-length 4
  iterations  5
  optout      off
</denial>
```

note

Default value of salt-length's arguments is "0". There is no salt if salt-length is "0".

8.3.4 Key Suite

A zone file can have several keys.

Preferably a zone file is configured with two keys:

- *KSK*
- *ZSK*

Configuration of the key is done in `<key-suite>`. The section has three keywords:

- `id`
- `key-template`
- `key-roll`.

`key-template` has the definition of the key and `key-roll` is the time schedule of the key.

configuration example of `<key-suite>`

```
<key-suite>
  id          "ksk-2048"

  key-template "ksk-2048"
  key-roll    "key-roll-ksk-2048"
</key-suite>
```

note

A zone with only a *ZSK* is acceptable, but a zone with only a *KSK* is not.

8.3.5 Key Template

There are two kinds of keys:

- *KSK*

configuration example of *<key-template>* with a *KSK*

```
<key-template>
  id          "ksk-2048"

  ksk         true
  algorithm   8
  size        2048
</key-template>
```

- *ZSK*.

configuration example of *<key-template>* with a *ZSK*

```
<key-template>
  id          "zsk-1024"

  ksk         false
  algorithm   8
  size        1024
</key-template>
```

The arguments of **algorithm** and **size** keywords are referenced in the configuration reference chapter (12.3.12).

note

The key-suite is configured in `<dnssec-policy>`.

configuration example with of `<dnssec-policy>` with *NSEC3*

```
<dnssec-policy>
  id          "dp-2"
  denial      "nsec3-denial"
  key-suite   "ksk-2048"
</dnssec-policy>
```

8.3.6 Key-roll

A *DNSSEC* key has a life-span. It starts with creating (generating) the key and ends with removing the key from the zone file.

A time schedule has several phases:

- Generate a key
- Publish a key in a zone
- Activate a key
- Inactive a key
- Remove a key from the zone

The mechanism for changing one key with another is called a key-roll over. Key-roll overs follow the time schedule of a key. There are two kinds of 'key-roll' mechanism:

- Relative
- Diary

Key-roll mechanism 'relative' style

configuration example of `<key-roll>` with relative mechanism

```
<key-roll>
  id          "key-roll-zsk-1024"

  create      +30d
  publish     +2h
  activate    +7200 # 2 hours (in seconds)
  inactive    +31d
  delete      +7d

</key-roll>
```

The `<key-roll>` with the relative mechanism has an **id** and time phases.

The time phase keywords are:

- **create**
- **publish**
- **activate**
- **inactive**
- **delete.**

One time phase has a keyword with 2 arguments. The first argument is a time period with a resolution in seconds. The second argument is the dependency of a time phase with a previous one.

For example, **publish** will be done 10 seconds after the **generate** time phase. The activate time phase will be done 30 seconds after the **publish** time phase.

note

The first argument always starts with a plus-sign.

note

The resolution of key rolls are in minutes. The seconds will be rounded up to the minute.

If the second argument is not given default values will be used. (see section 12.3.11)

Key-roll mechanism 'diary' style

configuration example of `<key-roll>` with diary mechanism

```
<key-roll>
  id          "key-roll-ksk-2048"

#  command      minutes  hours  day    month  day-week  week
  create        0        8     4     2     *         *
  publish       0        12    4     2     *         *
  activate      0        12    14    2     *         *
  inactive      0        8     4     3     *         *
  delete        0        12    11    3     *         *
</key-roll>
```

The `<key-roll>` with the diary mechanism has an **id** and time phases.

These “time phases keywords” are the same as those in the relative mechanism.

One time phase has one keyword with 6 arguments. The first argument is the minutes of the hour, the second is the hours of the day. The third argument is the day of the week, and the fourth is the month of the year. The fifth argument can be used to specify a day in a week (e.g. Wed for Wednesday). The last argument is the week number in the month.

note

A mix of relative mechanism and diary mechanism styles in one `<key-roll>` is not allowed.

See section 12.3.11 for further explanation.



9 DNS NAME SERVER IDENTIFIER (NSID)

9.1 Introduction

The *DNS* infrastructure is an integral and critical part of the Internet and the robustness of this system has constantly been improved since it was first used. The increased robustness has led to more complex setups where mechanisms like *DNS* anycast, name server pools and IP failovers allow different name servers to be available from a single IP address. These complex setups can make it very difficult to identify individual name servers. To identify different name servers, one could query for a specific record which is unique to each of the name servers. However, this method will not work for generic queries which comprise the bulk of all requests. DNS Name Server Identifier[9] (*NSID*) provides a solution by including a unique identifier within any *DNS* response. This feature is an extension of the *DNS* protocol. To allow backward compatibility, a name server that has the *NSID* extension will only send an *NSID* when it is explicitly asked for. The information, in response to the *NSID* option in the query, can be found in the EDNS OPT pseudo-*RR* in the response.

9.2 *NSID* payload

The *NSID* is a sequence of up to 512 arbitrary bytes set by the administrator. When queried, the byte sequence is usually represented as a hexadecimal string followed by its corresponding ASCII chars, if possible.

The syntax and semantics of the content of the *NSID* option are deliberately left outside the scope of this specification.

Examples of *NSID*:

- It could be the “real” name of the specific name server within the name server pool.
- It could be the “real” IP address (IPv4 or IPv6) of the name server within the name server pool
- It could be a pseudo-random number generated in a predictable fashion somehow using the server’s IP address or name as a seed value

- It could be a probabilistically unique identifier initially derived from a random number generator then preserved across reboots of the name server
- It could be a dynamically generated identifier so that only the name server operator could tell whether or not any two queries had been answered by the same server
- It could be a blob of signed data, with a corresponding key which might (or might not) be available via *DNS* lookups.



DNS RESPONSE RATE LIMITING (RRL)

10.1 Introduction

A typical Distributed Denial of Service (DDoS) attack relies on a great number of hosts to send many requests simultaneously to disrupt a service. *DNS* is at the core of the Internet and when this service is disrupted, many other services are disrupted as well as collateral damage. Therefore many *DNS* service providers have made major investments in good connectivity to mitigate attacks directed at their infrastructure. A *DNS* amplification attack is a special form of DDoS which takes advantage of the stateless nature of *DNS* queries to create forged *DNS* requests. Answers to these requests are sent to the actual target of the attack. The *DNS* protocol has been designed with efficiency in mind. Therefore a typical request requires a minimal amount of bandwidth to the name server, but can trigger a huge response which is typically many times larger than the original request. These huge responses allow attackers to hedge their disposable bandwidth with the bandwidth available at some DNS servers by making them unwilling participants in this special form of DDoS.

10.2 What is it?

The DNS Response Rate Limiting is an algorithm that helps mitigating *DNS* amplification attacks. The name servers have no way of knowing whether any particular *DNS* query is real or malicious, but it can detect patterns and clusters of queries when they are abused at high volumes and can so reduce the rate at which name servers respond to high volumes of malicious queries.

10.3 The problem

Any internet protocol based on **User Datagram Protocol**[44] (UDP) is suitable for use in a Denial of Service (DDoS) attack, but *DNS* is especially well suited for such malevolence. There are several reasons:

- Reflected/Spoofed attack

DNS servers cannot tell by examining a particular packet whether the source address in that

packet is real or not. Most *DNS* queries are done by UDP. UDP does not have source address verification.

- Small *DNS* queries can generate large responses

Especially when used with *DNSSEC*, the responses can be 10-20 (or more) times larger than the question.

10.4 *A solution*

If one packet with a forged source address arrives at a DNS server, there is no way for the server to tell it is forged. If hundreds of packets per second arrive with very similar source addresses asking for similar or identical information, there is a very high probability that those packets, as a group, form part of an attack. The Response Rate Limiting (RRL) algorithm has two parts. It detects patterns in incoming queries, and when it finds a pattern that suggests abuse, it can reduce the rate at which replies are sent.

- Clients are grouped by their masked IPs, using **ipv4-prefix-length** and **ipv6-prefix-length**.
- Clients are kept in a table with a size varying from **min-table-size** to **max-table-size**.
- The **responses-per-second** is the maximum number of “no-error” answers that will be given to a client in the duration of a second.
- The **errors-per-second** is the maximum number of error answers that will be given to a client in the duration of a second.
- The **window** is the period for which the rates are measured. If the client goes beyond any of its allowed rates, then the majority of further answers will be dropped until this period of time has elapsed. Every **slip** dropped answers, a truncated answer may randomly be given, allowing the client to ask the query again using TCP.

11.1 Introduction

A multi-master *DNS* server configuration is a setup where more than one primary name server exists for the same zone and a secondary name server is configured to communicate with multiple primary name servers.

The benefit of having a multi-master configuration is that if one of the primary name servers is down or is in a maintenance mode the secondary name server can still request updates.

The secondary name server will listen to the notifications from all the primary name servers, but will always request the updates from the same preferred primary name server. If the preferred name server no longer answers, the next primary name server in the list of primary name servers (**masters**) will be used. From then on, this primary name server has the highest priority in the list and becomes the new preferred primary name server.

If **true-multimaster** is set to true, switching to the new preferred primary name server will result in a full zone transfer. This feature should be used when the primary name servers are truly separate and/or the zone files will not contain identical information.

note

When `true-multimaster` is set to false (default), the secondary name server will not perform a (partial) zone transfer when switching to the new preferred master with a lower or identical serial.

note

When notifications are received from other primary name servers, the secondary name server will always check with the preferred master.

11.2 What is needed?

11.2.1 Zone

configuration example of `<zone>` with several masters

```
<zone>
  domain          somedomain.eu
  file            somedomain.eu.
  type            slave

  masters         192.0.2.1,192.0.2.2,192.0.2.3
  true-multimaster no # 'no' is default, this line can be left out
</zone>
```

In this example the secondary name server listens to the notifications from the 3 primary name servers (masters). The secondary name server will always ask for *DNS UPDATES* from the first in the list. In this example, 192.0.2.1.

If the first primary name server no longer answers, the secondary name server will ask for updates from the second primary name server in the list, 192.0.2.2. From then on the secondary name server continues to ask the second primary name server for updates until this name server no longer answers. The secondary name server asks the next one in the list. After the last primary name server stops answering, the secondary name server starts from the first in the list, 192.0.2.1, again.

If the **true-multimaster** is set to “no”, the secondary name server expects that all primary name servers are in sync and that their zone information is the same.

12.1 Layout

The configuration file has some rules:

- The configuration is read from a simple text file.
- A comment starts after the '#' character.
- Empty lines have no effect.
- A string can be double quoted, but is not mandatory.

The configuration file is made up of sections. A section starts with a with a `<name>` line and ends with a `</name>` line.

Currently the following sections are implemented:

- `<main>`
- `<zone>`
- `<key>`
- `<acl>`
- `<channels>`
- `<loggers>`
- `<nsid>`
- `<rrl>`
- `<dnssec-policy>`
- `<key-suite>`

- `<key-roll>`
- `<key-template>`
- `<denial>`

Unimplemented section names are ignored.

The section order is only of importance for sections of the same type where the principle first-found-first-processed applies. In other words, the last settings will overwrite earlier declarations of the same parameter. One exception is the `<zone>` section, where a declaration for the same domain will result in the error **DATABASE_ZONE_CONFIG_DUP**.

configuration example

```
<zone>
  domain  somedomain.eu
  file    masters/somedomain.eu.zone
  type    master
</zone>

<zone>
  domain  somedomain.eu
  file    masters/somedomain2.eu.txt
  type    master
</zone>
```

In this example for the zone *somedomain.eu*, the *file* will be “masters/somedomain.eu.zone”.

The processing order of each section type is determined by the server implementation. Each section contains settings. A setting is defined on one line but can be spread over multiple lines using parenthesis.

configuration example

```
# comment
# comment
<first>
# comment
    setting0-name value ...
    setting1-name value ...
</first>

<second>
    setting2-name (
        value
        ...
    )
# comment
</second>
```

12.2 Types

Each setting can be one of the following types.

TYPE	DESCRIPTION
ACL	A list of ACL descriptors. User-defined ACLs are found in the <code><acl></code> section. The ‘any’ and ‘none’ descriptors are always defined. Elements of the list are separated by a ‘,’ or a ‘;’.
DNSSECTYPE	A <i>DNSSEC</i> type name. It can be a DNSSEC-enabled value (“nsec”, “nsec3” or “nsec3-optout”) or a DNSSEC-disabled value (“none”, “no”, “off” or “0”).
ENUM	A word from a specified set.
FLAG	A boolean value. It can be true (“1”, “enable”, “enabled”, “on”, “true”, “yes”) or false (“0”, “disable”, “disabled”, “off”, “false”, “no”).
FQDN	An Fully Qualified Domain Name (FQDN) text string. i.e.: www.eurid.eu.
GID	Group ID. (Can be a number or a name)
HOST(S)	A (list of) host(s). A host is defined by an IP (v4 or v6) and can be followed by the word ‘port’ and a port number. Elements of the list are separated by a ‘,’ or a ‘;’.
INTEGER / INT	A base-ten integer.
PATH / FILE	A file or directory path. i.e.: ‘/var/zones’.
STRING / STR	A text string. Double quotes can be used but are not mandatory. Without quotes the string will be taken from the first non-blank character to the last non-blank character.
UID	User ID. (Can be a number or a name)

TYPES

12.3 Sections

12.3.1 `<main>` section

This section defines the global or default settings of the server.

PARAMETER	TYPE	DEFAULT	DESCRIPTION
allow-control	ACL	none	Default server-control access control list. Only the sources matching the ACL are accepted.
allow-notify	ACL	any	Default notify access control list. Only the servers matching the ACL will be handled.
allow-query	ACL	any	Default query access control list. Only the clients matching the ACL will be replied to.
allow-transfer	ACL	none	Default transfer access control list. Only the clients matching the ACL will be allowed to transfer a zone (<i>AXFR</i> / <i>IXFR</i>).
allow-update	ACL	none	Default update access control list. Only the clients matching the ACL will be allowed to update a zone.
allow-update-forwarding	ACL	none	Default update-forwarding access control list. Only the sources matching the ACL are accepted.
answer-formerr-packets	FLAG	true	If this flag is disabled; the server will not reply to badly formatted packets.
axfr-compress-packets; axfr-compresspackets	FLAG	true	Enables the <i>DNS</i> packet compression of each <i>AXFR</i> packet.
axfr-max-packet-size; axfr- maxpacketsize	INT	4096 bytes	The maximum size of an <i>AXFR</i> packet. (MIN: 512; MAX: 65535)
axfr-max-record- by-packet; axfr- maxrecordbypacket	INT	0	The maximum number of records in each <i>AXFR</i> packet. Older name servers can only handle 1. Set to 0 to disable the limit. (MIN: 0; MAX: 65535)
axfr-retry-delay	INT	600 sec	Number of seconds between each retry for the first transfer from the master name server. (MIN: 60; MAX: 86400)
axfr-retry-jitter	INT	180 sec	Jitter applied to axfr-retry-delay. (MIN: 60; MAX: axfr-retry-delay)
chroot	FLAG	off	Enabling this flag will make the server jail itself in the chroot-path directory.
chroot-path; chrootpath	PATH	/	The directory used for the jail.

MAIN SECTION

PARAMETER	TYPE	DEFAULT	DESCRIPTION
cpu-count-override	INT	0	Overrides the detected number of logical cpus. Set to 0 for automatic. (MIN: 0; MAX: 256)
config-file; configfile daemon; daemonize	FILE FLAG	yadifad.conf ^a false	The configuration file. Enabling this flag will make the server detach from the console and work in background.
data-path; datapath	PATH	zones ^b	The base path where lies the data (zone file path; journaling data; temporary files; etc.)
dnssec-thread-count	INT	0	The maximum number of threads used for <i>DNSSEC</i> parallel tasks (mostly signatures). Set to 0 for automatic. (MIN: 0; MAX: 128)
edns0-max-size	INT	4096	<i>EDNS0</i> packets size. (MIN: 512; MAX: 65535)
gid; group hostname-chaos; hostname	GID STR	0 (or root) the host name	The group ID that the server will use. The string returned by a hostname-chaos TXT CH query.
keys-path; keyspath listen	PATH HOSTS	zones/keys ^b 0.0.0.0	The base path of the <i>DNSSEC</i> keys. The list of interfaces to listen to.
log-from-start	FLAG	off	Enabling this flag will make the server start logging immediately to stdout; even before the loggers are initialized.
log-path; logpath	PATH	log ^b	The base path where the log files are written.
log-unprocessable	FLAG	off	Enabling this flag will make the server log unprocessable queries.
max-tcp-queries; max-tcp-connections	INT	16	The maximum number of parallel TCP queries; allowed. (MIN: 1; MAX: 255)
pid-file; pidfile queries-log-type	STR INT	run/yadifad.pid ^b 1	The pid file name. Query log format. (0: none; 1: <i>YADIFA</i> format; 2: <i>BIND</i> format; 3: <i>YADIFA</i> and <i>BIND</i> format at once)
serverid-chaos; serverid	STR	-	The string returned by a id.server.TXT CH query. If not set; <i>REFUSED</i> is answered.

MAIN SECTION

^aSYSCONFDIR is set at compile time; typically PREFIX/etc or /etc/yadifa

^bLOCALSTATEDIR is set at compile time; typically PREFIX/var or /var

PARAMETER	TYPE	DEFAULT	DESCRIPTION
server-port; port	INT	53	The default <i>DNS</i> port. (MIN: 1; MAX: 65535)
sig-signing-type	INT	65534	The resource record type that will be created while the signing is in progress. (MIN: 0; MAX: 65535)
sig-validity-interval	INT	30 (days)	The number of days for which an automatic signature is valid. (MIN: 7 days; MAX: 30 days)
sig-validity-jitter; sig-jitter	INT	3600 sec	The signature expiration validity jitter in seconds (1 hour). (MIN: 0 sec; MAX: 86400 sec)
sig-validity-regeneration	INT	auto hours	Signatures expiring in less than the indicated amount of hours will be recomputed. The default will be chosen by <i>YADIFA</i> . (MIN: 24 hours; MAX: 168 hours)
statistics	FLAG	true	The server will log a report line about some internal statistics.
statistics-max-period	INT	60 sec	The period in seconds between two statistics log lines. (MIN: 1 sec; MAX: 31 * 86400 seconds (31 days))
tcp-query-min-rate	INT	512 bytes/sec	The minimum transfer rate required in a TCP connection (read and write). Slower connections are closed. The units are bytes per second. (MIN: 0; MAX: 4294967295)
thread-count-by-address	INT	-1	Number of independent threads used to process each listening address. Set to -1 for automatic. Set to 0 for single threaded. (MIN: -1; MAX: number of CPU's)
uid; user	UID	0 (or root)	The user ID that the server will use.
version-chaos; version	STR	yadifa version#	The string returned by a version TXT CH query.
xfr-connect-timeout	INT	5 sec	Timeout for establishing a connection for <i>AXFR</i> and <i>IXFR</i> transfers. (MIN: 0 sec; MAX: 4294967295 sec)
xfr-path; xfrpath	PATH	zones/xfr ^b	The base path used for <i>AXFR</i> and journal storage.
zone-load-thread-count	INT	1	Number of independent threads used to process loading of the zones. (MIN: 0; MAX: 4294967295)
zone-download-thread-count	INT	4	Number of independent threads used to download the zones. (MIN: 0; MAX: 4294967295)

MAIN SECTION

configuration example

```
<main>
  chroot                on
  daemonize             true
  chroot-path           /srv/yadifa/var
  keys-path             /zones/keys
  data-path             /zones
  log-path              /log
  pid-path              /run
  pid-file              yadifad.pid

  cpu-count-override   6
  dnssec-thread-count  10
  max-tcp-queries      100
  tcp-query-min-rate   6000

  additional-from-auth  yes
  authority-from-auth   yes
  answer-formerr-packets no

  listen                192.0.2.53, 192.0.2.153 port 8053

  hostname              my-shown-hostname
  serverid              ns-loc-01

  user                  yadifad
  group                 yadifad

  statistics            yes
  statistics-max-period 60

  # could have been written as: 'version not disclosed' without the '
  version                "not disclosed"

  # note: Any is default anyway
  allow-query           any
  allow-update          operations-network ; public-network
  allow-transfer        slaves ; operations-network ; public-network

  sig-signing-type      65542
  sig-validity-interval 360
  sig-validity-regeneration 48
  sig-validity-jitter   1800

  axfr-max-record-by-packet 0
  axfr-max-packet-size  32768
  axfr-compress-packets true
</main>
```

12.3.2 <zone> sections

Each zone is defined by one section only.

PARAMETER	TYPE	DEFAULT	DESCRIPTION
allow-control	ACL	as main	Control commands control list. Only the matching sources are allowed.
allow-notify	ACL	as main	Notify access control list. Only the servers matching the ACL will be handled.
allow-query	ACL	as main	Query access control list. Only the clients matching the ACL will be replied to.
allow-transfer	ACL	as main	Transfer access control list. Only the clients matching the ACL will be allowed to transfer a zone (<i>AXFR/IXFR</i>
allow-update	ACL	as main	Update access control list. Only the clients matching the ACL will be allowed to update a zone.
allow-update-forwarding	ACL	as main	Update forwarding control list. Only the matching sources are allowed.
dnssec-mode; dnssec	DNSSEC-TYPE	off	Type of <i>DNSSEC</i> used for the zone. As master name sever; <i>YADIFA</i> will try to maintain that state.
dnssec-policy	STR	-	Sets the dnssec-policy id to be used.
domain	FQDN	-	Mandatory. Sets the domain of the zone (i.e.: eurid.eu).
drop-before-load	FLAG	off	Enabling this flag will make the server drop the zone before loading the updated zone from disk. Use this on systems constrained for RAM.
file-name; file	FILE	-	Sets the zone file name. Only mandatory for a master zone. Relative paths to <i><main></i> data-path
journal-size-kb; journal-size	INT	0	Puts a soft limit on the size of the journal; expressed in KB. (MIN: 0; MAX: 8388608 (8GB))
keys-path; keyspath	PATH	as main	The base path of the <i>DNSSEC</i> keys.
maintain-dnssec	FLAG	true	Enabling this flag will cause the server to try and maintain <i>RRSIG</i> records
masters; master	HOSTS	-	Mandatory for a slave. Sets the master server(s). Multiple masters are supported.

ZONE SECTION

PARAMETER	TYPE	DEFAULT	DESCRIPTION
multimaster-retries	INT	0	The number of times the master is unreachable before switching to a different master. (MIN: 0; MAX: 256)
no-master-updates	FLAG	false	Enabling this flag will prevent the server from probing or downloading changes from the master.
notifies; also-notify; notify	HOSTS	-	The list of servers to notify in the event of a change. Currently only used by masters when a dynamic update occurs.
notify-auto	FLAG	true	Enabling this flag will cause <i>Notification of Zone Changes</i> [47] (<i>DNS NOTIFY</i>) messages to be sent to all name servers in the APEX. Disabling this flags causes the content of APEX to be ignored (<i>NS Records</i>).
notify-retry-count; retry-count	INT	5	Number of times <i>YADIFA</i> tries to send a <i>DNS NOTIFY</i> . (MIN: 0; MAX: 10)
notify-retry-period; retry-period	INT	1	Time period in minutes between two <i>DNS NOTIFY</i> attempts. (MIN: 1; MAX: 600)
notify-retry-period-increase; retry-period-increase	INT	0	Increase of the time period in minutes between two <i>DNS NOTIFY</i> attempts. (MIN: 0; MAX: 600)
sig-validity-interval; signature-validity-interval	INT	as main	The number of days for which an automatic signature is valid. (MIN: 7 days; MAX: 30 days)
sig-validity-regeneration; signature-regeneration	INT	as main	The signatures expiring in less than the indicated amount of hours will be recomputed. (MIN: 24 hours; MAX: 168 hours)
sig-validity-jitter; signature-sig-jitter; signature-jitter; sig-jitter	INT	as main	The signature expiration validity jitter in seconds. (MIN: 0 sec; MAX: 86400 sec)
true-multimaster	FLAG	off	Enabling this flag will make the server use <i>AXFR</i> when switching to a new master.
type	ENUM	-	Mandatory. Sets the type of zone : either master or slave .

ZONE SECTION

sig-* and allow-* settings defined here have precedence over those in the <main> section.

configuration example

```
<zone>
  domain                somedomain.eu.
  type                  master
  file-name             masters/somedomain.eu-signed.txt

  # The rest is not mandatory ...

  also-notify           192.0.2.194, 192.0.2.164

  # Doing this is pointless since it's both the global setting AND
  # the default one

  allow-query           any
  allow-update          my-network; 127.0.0.1
  allow-transfer        my-slaves

  # Same as global setting
  sig-signing-type      65542
  sig-validity-interval 720           # 30 days is enough
  sig-validity-regeneration 12
  sig-validity-jitter   7200

  journal-size-kb      64           # 64 KB
</zone>

<zone>
  domain                another-zone.eu
  type                  slave
  master                192.0.2.53
</zone>
```

12.3.3 <key> sections

Each TSIG key must be defined by one section.

PARAMETER	TYPE	DEFAULT	DESCRIPTION
algorithm	ENUM	-	Mandatory. Sets the algorithm of the key. Supported values are : ‘hmac-md5’, ‘hmac-sha1’, ‘hmac-sha224’, ‘hmac-sha256’, ‘hmac-sha384’, ‘hmac-sha512’ (the algorithm names are case insensitive)
name	FQDN	-	Mandatory. Sets the name of the key.
secret	TEXT	-	Mandatory. Sets the value of the key. BASE64 encoded.

KEY SECTION

configuration example

```

<key>
  name      yadifa
  algorithm hmac-md5
  secret    WouldNtYouWantToKnowIt==
</key>

<key>
  name      eu-slave1
  algorithm hmac-md5
  secret    WouldNtYouWantToKnowIt==
</key>

<key>
  name      eu-slave2
  algorithm hmac-md5
  secret    WouldNtYouWantToKnowIt==
</key>

```

12.3.4 <acl> section

Each entry of the acl section defines a rule of access. Each rule is a name (a single user-defined word) followed by a rule in the form of a list of statements. The separator can be ‘,’ or ‘;’. The ‘any’ and ‘none’ names are reserved. A statement tells if a source is accepted or rejected. Reject statements are prefixed with ‘!’. Statements are evaluated in the following order: first from more specific to less specific, then from reject to accept. If a statement matches, the evaluation will stop

and accordingly accept or reject the source. If no statement matches, then the source is rejected.

A statement can be either:

- An IPv4 or an IPv6 address followed (or not) by a mask.
[!]ipv4|ipv6[/mask]

For example:

```
configuration sample
internal-network      192.0.2.128/26;2001:DB8::/32
```

- The word 'key' followed by the name of a TSIG key.
key key-name

For example:

```
configuration sample
slaves                key public-slave;key hidden-slave
```

- An ACL statement name from the <acl> section. Note that negation and recursion are forbidden and duly rejected.
acl-name

For example:

```
configuration sample
who-can-ask-for-an-ixfr  master;slaves;127.0.0.1
```


configuration example

```
<acl>
  # user-defined-name    rule-statements

  # rule to accept this TSIG key

  slave1                key eu-slave1

  # rule to accept that TSIG key

  slave2                key eu-slave2

  # rule to accept what the slave1 and slave2 rules are accepting

  slaves                slave1;slave2

  # rule to accept this IP

  master                192.0.2.2

  # rule to accept both this IPv4 network and that IPv6 network
  operations            192.0.2.128/28;2001:DB8::/32

  # Now about the order of each ACL statement : the following rule

  order-example-1      192.0.2.128/26 ; 192.0.2.5 ;
                      ! 192.0.2.133 ; ! 192.0.2.0/26

  # will be understood the same way as this one

  order-example-2      192.0.2.5 ; !192.0.2.133 ;
                      192.0.2.128/26 ; !192.0.2.0/26

  # Because in effect, both will be seen internally as:

  order-example-3      !192.0.2.133 ; 192.0.2.5 ;
                      !192.0.2.0/26 ; 192.0.2.128/26

</acl>
```

12.3.5 <channels> section

Channels are loggers output stream definitions. Three types are supported:

- file

- STDOUT, STDERR
- syslog.

Each channel is a name (a single user-defined word) followed by:

- the 'syslog' keyword, defining a channel to the syslog daemon. The keyword can be followed by case-insensitive facilities and options arguments. These arguments will be given to syslog. Note that only one facility should be given.

Supported facilities:

PARAMETER	DESCRIPTION
auth	Security/authorisation messages (DEPRECATED: use authpriv)
authpriv	Security/authorisation messages (private)
cron	Clock daemon (cron and at)
daemon	System daemons without separate facility value
ftp	Ftp daemon
local0	Reserved for local use
local1	Reserved for local use
local2	Reserved for local use
local3	Reserved for local use
local4	Reserved for local use
local5	Reserved for local use
local6	Reserved for local use
local7	Reserved for local use
lpr	Line printer subsystem
mail	Mail subsystem
news	USENET news subsystem
syslog	Messages generated internally by syslogd(8)
user	Generic user-level messages
uucp	UUCP subsystem

CHANNELS SECTION

Supported options:

PARAMETER	DESCRIPTION
cons	Write directly to system console if there is an error while sending to system logger.
ndelay	Open the connection immediately (normally, the connection is opened when the first message is logged).
nowait	Don't wait for child processes that may have been created while logging the message (On systems where it is relevant).
odelay	Opening of the connection is delayed until syslog() is called (This is the default, and need not be specified).
perror	(Not in POSIX.1-2001.) Print to stderr as well.
pid	Include PID with each message.

CHANNELS (syslog) SECTION

note

For more information: `man syslog`

For example:

configuration sample

```
syslog syslog CRON,PID
```

- The 'STDOUT' case-sensitive keyword, defining a channel writing on the standard output.

For example:

configuration sample

```
default-output STDOUT
```

- The 'STDERR' case-sensitive keyword, defining a channel writing on the standard error.

For example:

configuration sample

```
default-error STDERR
```

- A relative file path, defining a channel writing on a file (append at the end). The file is followed by the file rights as an octal number.

For example:

configuration sample

```
yadifa yadifa.log 0644
```

configuration example

```
<channels>
  # user-defined-name      parameters

  # channel 'statistics': a file called stats.log
  #                          with 0644 access rights
  #
  statistics                stats.log 0644

  # channel 'syslog' :      a syslog daemon output using
  # the local6 facility and logging the pid of the process
  #
  syslog                    syslog local6,pid

  # channel 'yadifa': a file called yadifa.log with 0644 access rights
  #
  yadifa                    yadifa.log 0644

  # channel 'debug-out' : directly printing to stdout
  #
  debug-out                 STDOUT

  # channel 'debug-err' : directly printint to stderr
  #
  debug-err                 STDERR
</channels>
```

12.3.6 <loggers> section

Yadifa has a set of log sources, each of which can have their output filtered (or ignored) and sent to a number of channels.

A logger line is defined as the source name followed by the list of levels and then the list of channels. The lists are ',' separated.

The current set of sources is:

SOURCES	DESCRIPTION
database	Database output (incremental changes, integrity checks, etc.)
dnssec	<i>DNSSEC</i> output (<i>NSEC</i> , <i>NSEC3</i> , signatures events)
server	Server actions output (network setup, database setup, queries, etc.)
statistics	Internal statistics periodic output
system	Low-level output (thread management, task scheduling, timed events)
zone	Internal zone loading output
queries	Queries output

LOGGERS SECTION

The current set of levels is:

LEVELS	DESCRIPTION
emerg	System is unusable
alert	Action must be taken immediately
crit	Critical conditions
err	Error conditions
warning	Warning conditions
notice	Normal, but significant, condition
info	Informational message
debug	Debug-level 0 message
debug1	Debug-level 1 message
debug2	Debug-level 2 message
debug3	Debug-level 3 message
debug4	Debug-level 4 message
debug5	Debug-level 5 message
debug6	Debug-level 6 message
debug7	Debug-level 7 message
prod	All non-debug levels
all	All levels
*	All levels

LEVELS

note

Messages at the 'crit', 'alert' and 'emerg' levels do trigger an automatic shutdown of the server.

If the logger section is omitted completely, everything is logged to the STDOUT channel. Negations are not allowed.

configuration

```
<loggers>
  # info, notice and warning level messages from the database logging
  # will be output
  database      info,notice,warning    yadifa
  database      err,crit,alert,emerg   yadifa,syslog
  server        *                      yadifa
  stats         *                      statistics
  system        *                      debug-err
  queries       *                      queries
  zone          *                      yadifa
</loggers>
```

The defined loggers are:

system contains low level messages about the system such as memory allocation, threading, IOs, timers and cryptography, ...

database contains messages about most lower-level operations in the DNS database. ie: journal, updates, zone loading and sanitization, DNS message query resolution, ...)

dnssec contains messages about lower-level dnssec operations in the DNS database. ie: status, maintenance, verification, ...

server contains messages about operations in the DNS server. ie: startup, shutdown, configuration, transfers, various services status (database management, network management, DNS notification management, dynamic update management, resource rate limiting, ...)

zone contains messages about the loading of a zone from a source (file parsing, transferred binary zone reading, ...)

stats contains the statistics of the server. (See chapter 15)

queries contains the queries on the server. Queries can be logged with the bind and/or with the *YADIFA* format.

bind format:

client sender-ip#port: query: fqdn class type +SETDC (listen-ip)

YADIFA format:

query [id] {+SETDC} fqdn class type (sender-ip#port)

where:

id is the query message id

+ means the message has the Recursion Desired flag set

S means the message is signed with a *TSIG*
E means the message is EDNS
T means the message was sent using TCP instead of UDP
D means the message has the DNSSEC OK flag set
C means the message has the Checking Disabled flag set
fqdn is the queried FQDN
class is the queried class
type is the queried type
sender-ip is the IP of the client that sent the query
port is the port of the client that sent the query
listen-ip is the listen network interface that received the message

Note that on *YADIFA* any unset flag is replaced by a '-', on bind only the '+' follows that rule.

System operators will mostly be interested in the info and above messages of queries and stats, as well as the error and above messages of the other loggers.

12.3.7 <nsid> section

note

If you want to have DNS Name Server Identifier Option (NSID) support in *YADIFA* you need to enable this function before compiling the sources.

```
shell
```

```
$ ./configure --enable-nsid
```

After the 'configure', you can do the normal 'make' and 'make install'.

```
shell
```

```
$ make
$ make install
```

PARAMETER	TYPE	DEFAULT	DESCRIPTION
ascii	STR	""	The string can be 512 characters long.
hex		""	

NSID SECTION

configuration example ascii

```
<nsid>
  ascii belgium-brussels-01
</nsid>
```

configuration example hex

```
<nsid>
  hex 00320201
</nsid>
```

12.3.8 <rrl> section

YADIFA has support for RRL enabled by default.

PARAMETER	TYPE	DEFAULT	DESCRIPTION
responses-per-second	INT	5	Allowed response rate.
errors-per-second	INT	5	Allowed error rate.
slip	INT	2	Random slip parameter.
log-only	FLAG	false	If set to true, logs what it should do without doing it.
ipv4-prefix-length	INT	24	Mask applied to group the IPv4 clients.
ipv6-prefix-length	INT	56	Mask applied to group the IPv6 clients.
exempt-clients,exempted	ACL	none	Clients matching this rule are not subject to the RRL.
enabled	FLAG	false	Enables the RRL
min-table-size	INT	1024	RRL buffer minimum size
max-table-size	INT	16384	RRL buffer maximum size
window	INT	15	RRL sliding window size in seconds

RRL SECTION

configuration example

```
<rrl>
  responses-per-second      5
  errors-per-second        5
  slip                     10
  log-only                 off
  ipv4-prefix-length       24
  ipv6-prefix-length       56
  exempt-clients           none
  enabled                  yes
</rrl>
```

12.3.9 <dnssec-policy> section

PARAMETER	TYPE	DEFAULT	DESCRIPTION
id	STR	-	id of the dnssec-policy section.
description	STR	-	Description for the dnssec-policy section.
key-suite	STR	-	id of the <key-suite> to be used.
denial	STR	nsec	id of the <denial> to be used for <i>NSEC3</i> or the argument 'nsec' to use <i>NSEC</i> .

DNSSEC-POLICY SECTION

configuration example with <denial>

```
<dnssec-policy>
  id                  "dnssec-policy-nsec3"

  description        "Example of ZSK and KSK"
  denial             "nsec3-resalting-on"
  key-suite          "zsk-1024"
  key-suite          "ksk-2048"
</dnssec-policy>
```

configuration example without `<denial>`

```
<dnssec-policy>
  id                "dp-nsec"

  description       "Example of ZSK and KSK"
  denial            "nsec"
  key-suite         "zsk-1024"
  key-suite         "ksk-2048"
</dnssec-policy>
```

12.3.10 `<key-suite>` section

PARAMETER	TYPE	DEFAULT	DESCRIPTION
id	STR	-	id of the key-suite section.
key-template	STR	-	id of the <code><key-template></code> to be used.
key-roll	STR	-	id of the <code><key-roll></code> to be used.

KEY-SUITE SECTION

configuration example `<key-suite>`

```
<key-suite>
  id                "ksk-2048"

  key-template      "ksk-2048"
  key-roll          "key-roll-ksk-2048-short-times"
</key-suite>
```

12.3.11 <key-roll> section

PARAMETER	TYPE	DEFAULT	DESCRIPTION
id	STR	-	id of the key-roll section.
generate; create	generated; STR	-	Time when the key must be generated.
publish	STR	-	Time when the key must be published in the zone.
activate	STR	-	Time when the key will be used for signing the zone or apex of the zone.
inactive	STR	-	Time when the key will not be used any-more for signing.
delete	STR	-	Time when the key will be removed out of the zone.

KEY-ROLL SECTION

configuration example section-key-roll

```

<key-roll>
  id                "key-roll-ksk-2048"

#  command      minutes  hours  day    month  day-week  week
  create        0         8     4     2     *         *
  publish       0         12    4     2     *         *
  activate      0         12    14    2     *         *
  inactive     0         8     4     3     *         *
  delete       0         12    11    3     *         *
</key-roll>

```

12.3.12 <key-template> section

PARAMETER	TYPE	DEFAULT	DESCRIPTION
id	STR	-	id of the key-template section.
ksk	FLAG	false	When this flag is enabled a <i>KSK</i> will be generated. When disabled a <i>ZSK</i> will be generated.
algorithm	ENUM	7	Sets the algorithm of the key. Supported values are: DSA; 3; RSASHA1; 5; NSEC3DSA; 6; NSEC3RSASHA1; 7; RSASHA256; 8; RSASHA512; 10; ECDSAP256SHA256; 13; ECDSAP384SHA384; 14.
size	INT	0	The length of the key in bits (incompatible sizes will be rejected). (MIN: 0; MAX: 4096)

KEY-TEMPLATE SECTION

configuration example section-key-template

```
<key-template>
  id          "ksk-2048"
  ksk         true
  algorithm   8
  size        2048
  engine      default
</key-template>
```

12.3.13 <denial> section

PARAMETER	TYPE	DEFAULT	DESCRIPTION
id	STR	-	id of the denial section.
salt	HEXSTR	-	The actual salt to use. Mutually exclusive with the salt-length option.
salt-length	INT	0	The system will generate a random salt with this length. Mutually exclusive with the salt option. (MIN: 0; MAX: 256)
iterations	INT	1	The number of iterations the salt and hash should be applied to the label. (MIN: 0; MAX: 65535)
optout	FLAG	false	When this flag is enabled only delegations which have a <i>DS</i> record will be considered for <i>NSEC3</i> record generation.

DENIAL SECTION

configuration example <denial>

```
<denial>
  id          "nsec3-resalting-on"

  salt        "ABCD"
  #salt-length 4
  iterations  5
  optout      off
</denial>
```

Only textual zones are implemented.

The format of a zone file is defined in **RFC 1034**[41] and **RFC 1035**[42].

zone file sample

```
;; Example domain
$TTL      86400   ; 24 hours
$ORIGIN   somedomain.eu.

somedomain.eu.      86400   IN   SOA  ns1.somedomain.eu.  info.somedomain.eu. (
                        1
                        3600
                        1800s
                        3600000s
                        600
                        )

                        86400   IN   MX   10 mail.somedomain.eu.
                        86400   IN   NS   ns1.somedomain.eu.

ns1.somedomain.eu.  86400   IN   A    192.0.2.2
mail.somedomain.eu. 86400   IN   A    192.0.2.3
www.somedomain.eu.  86400   IN   A    192.0.2.4
```

13.1 MACROS

Some macros are implemented:

- @
- \$TTL

■ \$ORIGIN

13.1.1 @

Use as a name, the @ symbol is replaced by the current origin. The initial value is the **domain** field of the <zone> section.

For example:

configuration sample

```
<zone>
  domain somedomain.eu
  ...
</zone>
```

zone file sample

```
;; The following @ is seen as somedomain.eu.

@           86400   IN  SOA ns1.somedomain.eu. info.somedomain.eu. (
                                1
                                3600
                                1800s
                                3600000s
                                600
                                )
```

13.1.2 \$TTL

This macro is the **TTL** value that is to be set for the resource records with an undefined **TTL**.

zone file sample

```
;; The following @ is seen as somedomain.eu.

$TTL 3600

somedomain.eu.      86400   IN      SOA   ns1.somedomain.eu.  info.somedomain.eu. (
                    1
                    3600
                    1800s
                    3600000s
                    600
                    )
ns1.somedomain.eu.  86400   A       192.0.2.2
mail.somedomain.eu. 86400   A       192.0.2.3
www.somedomain.eu.  86400   A       192.0.2.4
                   A       192.0.2.5
ftp.somedomain.eu.  A       192.0.2.6 ;; The TTL will be set using $TTL
```

13.1.3 \$ORIGIN

The value of this macro is appended to any following domain name not terminating with a “.”. The initial value is the **domain** field of the <zone> section.

zone file sample

```
;; The following @ is seen as somedomain.eu.

$TTL 3600
$ORIGIN somedomain.eu.
somedomain.eu.      86400   IN      SOA   ns1 info (
                    1
                    3600
                    1800s
                    3600000s
                    600
                    )
ns1                  86400   A       192.0.2.2
mail                 86400   A       192.0.2.3
www                  86400   A       192.0.2.4
```


13.2 Classes

YADIFA knows only one class:

- IN [42].

13.3 Resource record types

As master name server, *YADIFA* knows only the following *RR* types. Everything else will give an error and be ignored.

TYPE	VALUE	REFERENCE	SUPPORTED
A	1	RFC 1035[42]	Y
NS	2	RFC 1035[42]	Y
MD	3	RFC 1035[42]	N
MF	4	RFC 1035[42]	N
CNAME	5	RFC 1035[42]	Y
SOA	6	RFC 1035[42]	Y
MB	7	RFC 1035[42]	N
MG	8	RFC 1035[42]	N
MR	9	RFC 1035[42]	N
NULL	10	RFC 1035[42]	N
WKS	11	RFC 1035[42]	Y
PTR	12	RFC 1035[42]	Y
HINFO	13	RFC 1035[42]	Y
MINFO	14	RFC 1035[42]	N
MX	15	RFC 1035[42]	Y
TXT	16	RFC 1035[42]	Y
RP	17	RFC 1183[53]	N
AFSDB	18	RFC 1183[53] RFC 5864[6]	N
X25	19	RFC 1183[53]	N
ISDN	20	RFC 1183[53]	N
RT	21	RFC 1183[53]	N
NSAP	22	RFC 1706[16]	N
NSAP-PTR	23	RFC 1348[15] RFC 1637[17] RFC 1706[16]	N
SIG	24	RFC 4034[48] RFC 3755[57] RFC 2535[22] RFC 2536[23] RFC 2537[24] RFC 2931[2] RFC 3110[3] RFC 3008[58]	N

SUPPORTED TYPES

TYPE	VALUE	REFERENCE	SUPPORTED
KEY	25	RFC 4034 [48] RFC 3755 [57] RFC 2535 [22] RFC 2536 [23] RFC 2537 [24] RFC 2539 [25] RFC 3008 [58] RFC 3110 [3]	N
PX	26	RFC 2163 [7]	N
GPOS	27	RFC 1712 [10]	N
AAAA	28	RFC 3596 [51]	Y
LOC	29	RFC 1876 [20]	N
NXT	30	RFC 3755 [57] RFC 2535 [22]	N
EID	31	DNS Resource Records for Nimrod Routing Architecture	N
NIMLOC	32	DNS Resource Records for Nimrod Routing Architecture	N
SRV	33	RFC 2782 [26]	Y
ATMA	34	ATM Name System V2.0	N
NAPTR	35	RFC 2915 [19] RFC 2168 [40] RFC 3403 [39]	Y
KX	36	RFC 2230 [8]	N
CERT	37	RFC 4398 [35]	N
A6	38	RFC 3226 [28] RFC 2874 [33] RFC 6563 [14]	N
DNAME	39	RFC 6672 [59]	N
SINK	40	The Kitchen Sink Resource Record	N
OPT	41	RFC 6891 [54] RFC 3225 [?]	N
APL	42	RFC 3123 [37]	N
DS	43	RFC 4034 [48] RFC 3658 [29]	Y
SSHFP	44	RFC 4255 [27]	Y
IPSECKEY	45	RFC 4025 [46]	N
RRSIG	46	RFC 4034 [48] RFC 3755 [57]	Y
NSEC	47	RFC 4034 [48] RFC 3755 [57]	Y
DNSKEY	48	RFC 4034 [48] RFC 3755 [57]	Y
DHCID	49	RFC 4701 [30]	N
NSEC3	50	RFC 5155 [12]	Y
NSEC3PARAM	51	RFC 5155 [12]	Y
TLSA	52	RFC 6698 [50]	Y
HIP	55	RFC 5205 [38]	N
NINFO	56	The Zone Status (ZS) DNS Resource Record	N
RKEY	57	ENUM Encryption	N
TALINK	58	talink-completed-template	N
CDS	59	RFC 7344 [11]	N
CDNSKEY	60	RFC 7344 [11]	N
OPENPGPKEY	61	Using DANE to Associate OpenPGP public keys with email addresses	N
CSYNC	62	RFC 7477 [32]	N

SUPPORTED TYPES

TYPE	VALUE	REFERENCE	SUPPORTED
SPF	99	RFC 7208 [36]	N
UINFO	100	[IANA-Reserved]	N
UID	101	[IANA-Reserved]	N
GID	102	[IANA-Reserved]	N
UNSPEC	103	[IANA-Reserved]	N
NID	104	RFC 6742 [49]	N
L32	105	RFC 6742 [49]	N
L64	106	RFC 6742 [49]	N
LP	107	RFC 6742 [49]	N
EUI48	108	RFC 7043 [5]	N
EUI64	109	RFC 7043 [5]	N
TKEY	249	RFC 2930 [18]	N
TSIG	250	RFC 2845 [1]	N
IXFR	251	RFC 1995 [43]	N
AXFR	252	RFC 1035 [42] RFC 5936 [21]	N
MAILB	253	RFC 1035 [42]	N
MAILA	254	RFC 1035 [42]	N
*	255	RFC 1035 [42] RFC 6895 [4]	N
URI	256	The Uniform Resource Identifier (URI) DNS Resource Record	N
CAA	257	RFC 6844 [52]	N
TA	32768	Deploying DNSSEC Without a Signed Root	N
DLV	32769	RFC 4431 [56]	N

SUPPORTED TYPES

YADIFA has got a new journaling system since the release of version 2.1.0.

The old system:

- is based on a append-only file
- has a linear access time (with the exception of the last few entries) which was not ideal for random access on big journals
- could only be limited in growth by emptying it completely

The new system:

- is based on a file that is being written in a cyclic fashion
- has a relatively constant access time
- can be limited in size, although it is not a hard limit.

The journal size is automatically set by *YADIFA* at around half the size of the zone size, but it can be set to an arbitrary value through configuration. To do this, one merely needs to set `journal-size-kb` in the `<zone>` section of the zone. The value range for version 2.1.0 is 64KB to maximum 8GB.

configuration example

```
<zone>
  domain somedomain.eu
  ...
  journal-size-kb 64
</zone>
<zone>
  domain someotherdomain.eu
  ...
  journal-size-kb 256000
</zone>
```

Note that this size is a soft limit. In several cases, *YADIFA* will exceed that value.

- Incremental updates have to be written completely. One incremental change could in theory have a wire size of up to about 64KB, which may result in as many exceeding bytes.
- When closing, the journal may write an index table with a size relative to the journal's size. From a 24 bytes for a small journal to a few megabytes for gigabytes-sized journals.

In order to reduce the size of the journal after reconfiguring it, it is recommended that one uses the command line to synchronize the zone and wipe the journal empty.

YADIFA has a range of statistics available with one configuration setting. The statistics logger values are grouped into inputs, outputs and the RRL. Groups are composed of a name followed by an open parenthesis containing several space-separated event=count fields and ending in a closed parenthesis.

A single line of statistics looks as follows:

```
shell
```

```
udp (in=303 qr=303 ni=0 up=0 dr=0 st=91191 un=0 rf=0) tcp (in=369 qr=368 ni=0 up=0 dr=0 st=82477 un=0
rf=0 ax=0 ix=0 ov=0) udpa (OK=242 FE=0 SF=0 NE=0 NI=0 RE=61 XD=0 XR=0 NR=0 NA=0 NZ=0 BV=0 BS=0 BK=0
BT=0 BM=0 BN=0 BA=0 TR=0) tcpa (OK=209 FE=0 SF=0 NE=0 NI=0 RE=159 XD=0 XR=0 NR=0 NA=0 NZ=0 BV=0 BS=0
BK=0 BT=0 BM=0 BN=0 BA=0 TR=0) rrl (s1=0 dr=0)
```

You can clearly see the groups containing the event=count fields. There are currently 5 groups defined:

- `udp(...)` covers the UDP messages
- `udpa(...)` covers the UDP messages answers
- `tcp(...)` covers the TCP messages
- `tcpa(...)` covers the TCP messages answers
- `rrl(...)` covers the RRL events

The statistics logger counts the various events about the messages from the clients.

in input count

counts the number of *DNS* messages received

qr query count

counts the number of queries among the *DNS* messages

- ni** notify count
counts the number of notifications among the *DNS* messages
- up** update count
counts the number of updates among the *DNS* messages
- dr** dropped count
counts the number of *DNS* messages dropped
- st** total bytes sent (simple queries only)
counts the total number of bytes sent
- un** undefined opcode count
counts the number of undefined opcodes among the *DNS* messages
- rf** referral count
counts the number of referrals among the DNS queries
- ax** *AXFR* query count (TCP only)
counts the number of full zone transfers queried
- ix** *IXFR* query count (TCP only)
counts the number of incremental zone transfers queried
- ov** connection overflow (TCP only)
counts the number of times the TCP pool has been full when a new connection came in

The statistics logger answers counts the status of *DNS* answers sent to the clients.

- OK** NOERROR answer count
- FE** FORMERR answer count
- SF** SERVFAIL answer count
- NE** NXDOMAIN answer count
- NI** NOTIMP answer count
- RE** REFUSED answer count
- XD** YXDOMAIN answer count
- XR** YXRRSET answer count
- NR** NXRRSET answer count
- NA** NOTAUTH answer count
- NZ** NOTZONE answer count
- BV** BADVERS answer count

BS BADSIG answer count

BK BADKEY answer count

BT BADTIME answer count

BM BADMODE answer count

BN BADNAME answer count

BA BADALG answer count

TR BADTRUNC answer count

The RRL group only counts the two main events of the Response Rate Limiter.

dr dropped answer count

counts the number of times an answer has been dropped

sl truncated answer count

counts the number of times an answer that should have been dropped has been sent truncated instead

16.1 Introduction

zone file sample

```
;; Example domain
$TTL      86400   ; 24 hours
$ORIGIN   somedomain.eu.

somedomain.eu.      86400   IN   SOA  ns1.somedomain.eu.  info.somedomain.eu. (
                        1
                        3600
                        1800s
                        3600000s
                        600
                        )

                        86400   IN   MX   10 mail.somedomain.eu.
                        86400   IN   NS   ns1.somedomain.eu.

ns1.somedomain.eu.  86400   IN   A    192.0.2.2
mail.somedomain.eu. 86400   IN   A    192.0.2.3
www.somedomain.eu.  86400   IN   A    192.0.2.4
```

16.2 YADIFA as a primary name server

16.2.1 The One That is Really Easy

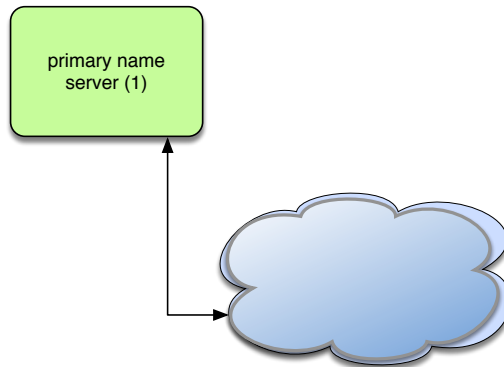


Figure 16.1: primary name server (simple configuration)

configuration example of That is Really Easy

```
<zone>
  domain      somedomain.eu
  file        "masters/somedomain.eu."
  type        "master"
</zone>
```

16.2.2 The One With Activation of Logging

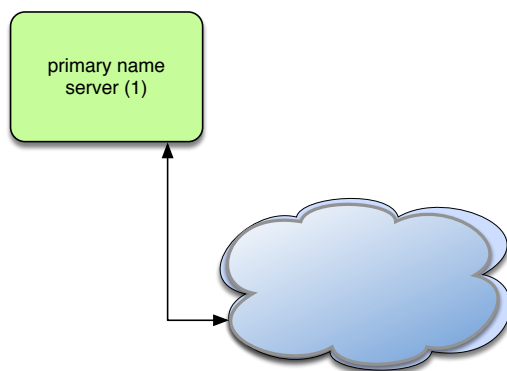


Figure 16.2: primary name server with logging

configuration example of Activation of Logging

```
<channels>
  # user-defined-name      parameters
  # channel 'statistics': a file called stats.log
  #                          with 0644 access rights
  #
  statistics                stats.log 0644

  # channel 'syslog'       : a syslog daemon output using
  # the local6 facility and logging the pid of the process
  #
  syslog                    syslog local6,pid

  # channel 'yadifa'       : a file called yadifa.log with 0644 access rights
  #
  yadifa                    yadifa.log 0644

  # channel 'debug-out'   : directly printing to stdout
  #
  debug-out                 STDOUT

  # channel 'debug-err'   : directly printint to stderr
  #
  debug-err                 STDERR
</channels>

<loggers>
  # info, notice and warning level messages from the database logging
  # will be output
  database                  info,notice,warning      yadifa
  database                  err,crit,alert,emerg    yadifa,syslog
  server                    *                       yadifa
  stats                     *                       statistics
  system                    *                       debug-err
  queries                   *                       queries
  zone                      *                       yadifa
</loggers>

<zone>
  domain                    somedomain.eu
  file                      "masters/somedomain.eu."
  type                      "master"
</zone>
```

16.2.3 The One With NSID

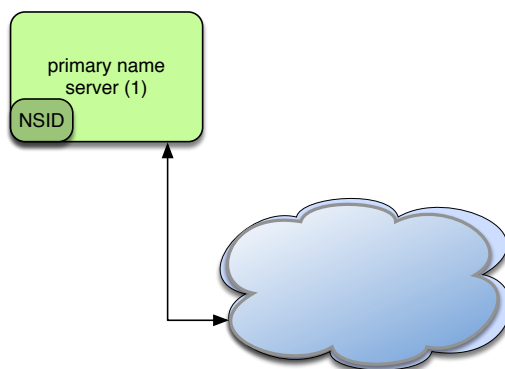


Figure 16.3: primary name server with NSID

configuration example of NSID

```
<nsid>
  ascii "yadifad example NSID"
  # alternatively, an hexadecimal format can be used
  # hex 796164696666164206578616d706c65204e5349440a
</nsid>

<zone>
  domain      somedomain.eu
  file        "masters/somedomain.eu."
  type        "master"
</zone>
```

16.2.4 The One With RRL

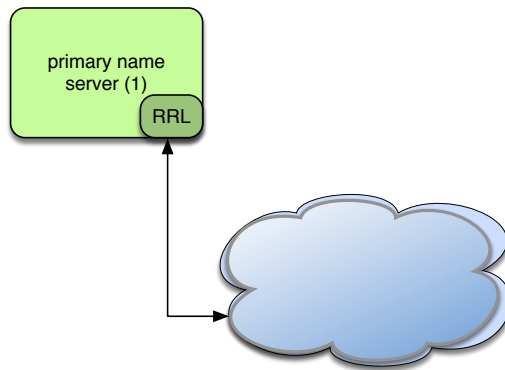


Figure 16.4: primary name server with RRL

configuration example of RRL

```
# If YADIFA has been compiled with the Response Rate Limiter (default)
<rrl>
  # enable the RRL
  enabled                true

  # don't actually limit the response rate, only log what the filter
  # would do
  log-only                false

  # how many responses per second are allowed for a client
  # (masked with the prefix)
  responses-per-second 5

  # how many errors per second are allowed for a client
  # (masked with the prefix)
  errors-per-second    5

  # window of time in which the rates are measured, expressed in seconds
  window                15

  # every "slip" dropped answers, a truncated answer may randomly be
  # given so the client can ask again using TCP
  slip                  2

  # the min size of the table storing clients(masked with the prefix)
  min-table-size       1024

  # the max size of the table storing clients(masked with the prefix)
  max-table-size       16384

  # IPv4 clients are masked with this prefix
  ipv4-prefix-length  24

  # IPv6 clients are masked with this prefix
  ipv6-prefix-length  56

  # the list of IP/networks (Access Control List) not impacted by
  # the RRL
  exempted              none
</rrl>

<zone>
  domain                somedomain.eu
  file                  "masters/somedomain.eu."
  type                  "master"
</zone>
```

16.2.5 The One With DNSSEC Policy 'diary' style

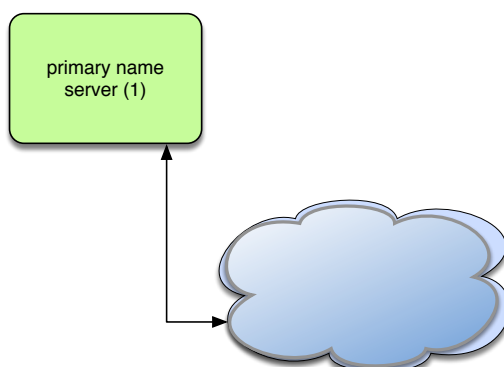


Figure 16.5: primary name server (DNSSEC policy 'diary' style)

configuration example of DNSSEC Policy 'diary' style

```
<key-roll>
  id          "key-roll-ksk-2048"

#  command    minutes  hours  day    month  day-week  week
  create      0         8      4      2      *         *
  publish     0         12     4      2      *         *
  activate    0         12     14     2      *         *
  inactive    0         8       4      3      *         *
  delete      0         12     11     3      *         *
</key-roll>

<key-roll>
  id          "key-roll-zsk-1024"

#  command    minutes  hours  day    month  day-week  week
  create      0         10     5      *      *         *
  publish     0         12     5      *      *         *
  activate    0         14     5      *      *         *
  inactive    0         10     6      *      *         *
  delete      0         10     11     *      *         *
</key-roll>

<key-suite>
  id          "ksk-2048"
  key-template "ksk-2048"
  key-roll    "key-roll-ksk-2048"
</key-suite>

<key-suite>
  id          "zsk-1024"
```



```
    key-template      "zsk-1024"
    key-roll          "key-roll-zsk-1024"
</key-suite>

<dnssec-policy>
  id                 "dp-nsec"

  description        "Example of ZSK and KSK"
  denial             "nsec"
  key-suite          "zsk-1024"
  key-suite          "ksk-2048"
</dnssec-policy>

<zone>
  domain             somedomain.eu
  file               masters/somedomain.eu.
  type               "master"
  dnssec-policy     "dp-nsec"
</zone>
```

16.2.6 The One With DNSSEC Policy 'relative' style

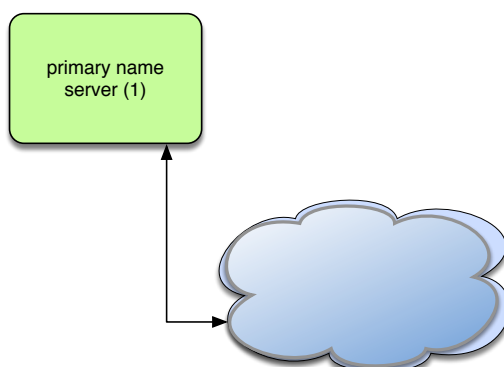


Figure 16.6: primary name server (DNSSEC policy 'relative' style)

configuration example of DNSSEC Policy 'relative' style

```
<key-roll>
  id          "key-roll-ksk-2048"

  create      +355d
  publish     +4h
  activate    +10d
  inactive    +366d
  delete      +7d
</key-roll>

<key-roll>
  id          "key-roll-zsk-1024"

  create      +30d
  publish     +2h
  activate    +7200 # 2 hours (in seconds)
  inactive    +31d
  delete      +7d
</key-roll>

<key-suite>
  id          "ksk-2048"
  key-template "ksk-2048"
  key-roll    "key-roll-ksk-2048"
</key-suite>

<key-template>
  id          "ksk-2048"
```

```

    ksk                true
    algorithm          8
    size              2048
    engine            default
</key-template>

<key-suite>
  id                  "zsk-1024"
  key-template       "zsk-1024"
  key-roll           "key-roll-zsk-1024"
</key-suite>

<key-template>
  id                  "zsk-1024"
  algorithm          8
  size              1024
  engine            default
</key-template>

<denial>
  id                  "nsec3-resalting-on"

  salt                "ABCD"
  #salt-length       4
  iterations         5
  optout             off
</denial>

<dnssec-policy>
  id                  "dnssec-policy-nsec3"

  description        "Example of ZSK and KSK"
  denial             "nsec3-resalting-on"
  key-suite          "zsk-1024"
  key-suite          "ksk-2048"
</dnssec-policy>

<zone>
  domain             somedomain.eu
  file               masters/somedomain.eu.
  type               "master"
  dnssec-policy     "dnssec-policy-nsec3"
</zone>

```

16.2.7 The One With the Controller

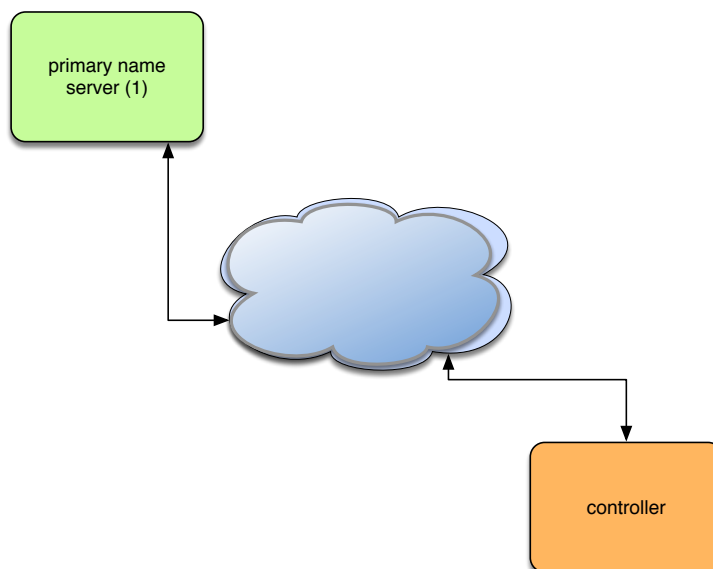


Figure 16.7: primary name server with controller

On the primary name server (SYSCONFDIR/yadifad.conf):

configuration example of Controller (server)

```
<main>
  allow-control      "yadifa-controller"
</main>

<acl>
  yadifa-controller  key "controller-key"
</acl>

<key>
  name               "controller-key"
  algorithm          "hmac-md5"
  secret            "ControlDaemonKey"
</key>
```

On the controller ($\${HOME}/.yadifa.rc$ or $SYSCONFDIR/yadifa.conf$):

configuration example of Controller (client)

```
<yadifa>
  server          192.0.2.1
  tsig-key-name  "controller-key"
</yadifa>

<key>
  name           "controller-key"
  algorithm      "hmac-md5"
  secret        "ControlDaemonKey"
</key>
```

16.3 YADIFA as a secondary name server

16.3.1 The One With One Master

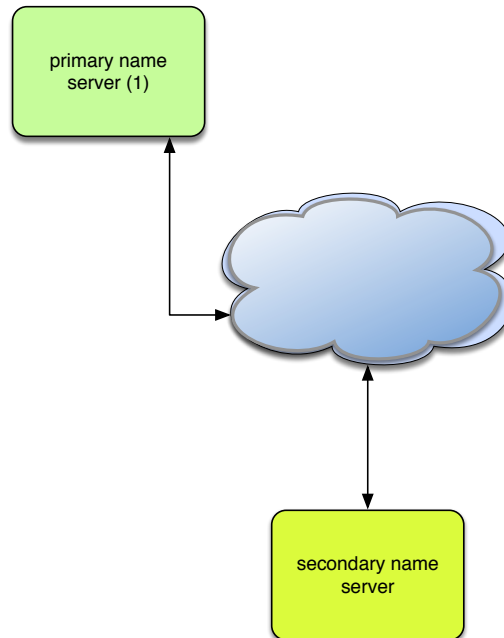


Figure 16.8: secondary name server (one master)

configuration example of One Master

```
<zone>
  domain      somedomain.eu
  file        "slaves/somedomain.eu."
  type        "slave"
  master      192.0.2.1
</zone>
```

16.3.2 The One With Several Masters

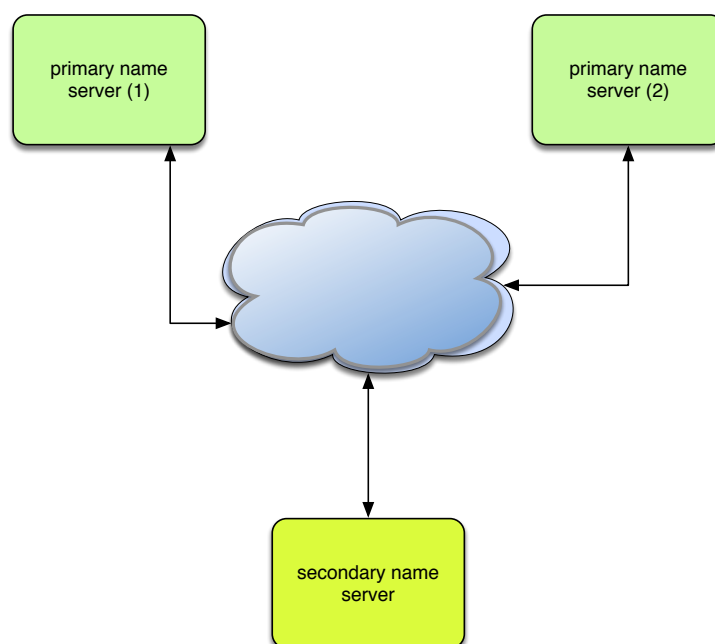


Figure 16.9: secondary name server (several masters)

configuration example of Several Masters

```
<zone>
  domain          somedomain.eu
  file            "slaves/somedomain.eu."
  type            "slave"

  masters         192.0.2.1,192.0.2.2
  true-multimaster yes
</zone>
```

16.3.3 The One With Activation of Logging

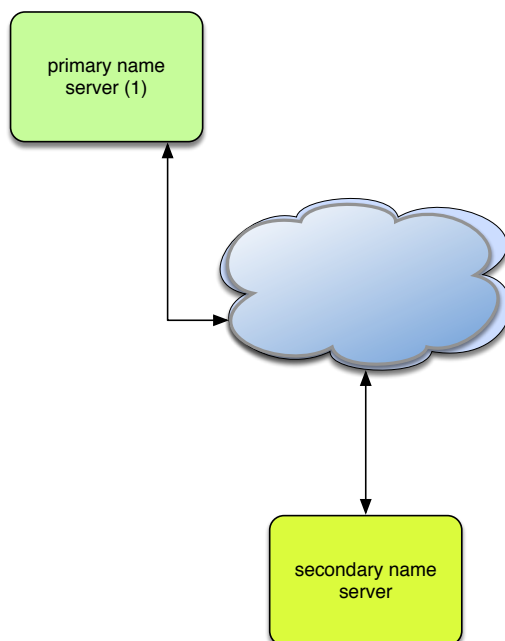


Figure 16.10: secondary name server with logging

configuration example of Activation of Loggin

```
<channels>
  # user-defined-name      parameters
  # channel 'statistics': a file called stats.log
  #                          with 0644 access rights
  #
  statistics                stats.log 0644

  # channel 'syslog'       : a syslog daemon output using
  # the local6 facility and logging the pid of the process
  #
  syslog                    syslog local6,pid

  # channel 'yadifa'       : a file called yadifa.log with 0644 access rights
  #
  yadifa                    yadifa.log 0644

  # channel 'debug-out'   : directly printing to stdout
  #
  debug-out                 STDOUT

  # channel 'debug-err'   : directly printint to stderr
  #
  debug-err                 STDERR
</channels>

<loggers>
  # info, notice and warning level messages from the database logging
  # will be output
  database                  info,notice,warning      yadifa
  database                  err,crit,alert,emerg    yadifa,syslog
  server                    *                       yadifa
  stats                     *                       statistics
  system                    *                       debug-err
  queries                   *                       queries
  zone                      *                       yadifa
</loggers>

<zone>
  domain                    somedomain.eu
  file                      "slaves/somedomain.eu."
  type                      "slave"
  master                    192.0.2.1
</zone>
```

16.3.4 The One With NSID

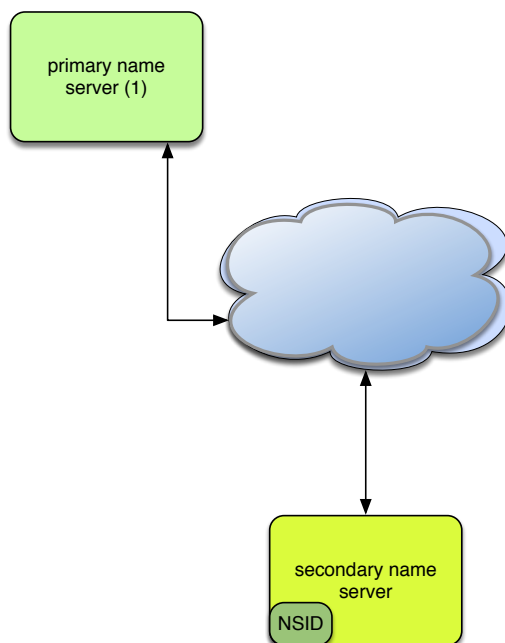


Figure 16.11: secondary name server with NSID

configuration example of NSID

```
<nsid>
  ascii "yadifad example NSID"
  # alternatively, an hexadecimal format can be used
  # hex 796164696666164206578616d706c65204e5349440a
</nsid>

<zone>
  domain          somedomain.eu
  file            "slaves/somedomain.eu."
  type            "slave"
  master          192.0.2.1
</zone>
```

16.3.5 The One With RRL

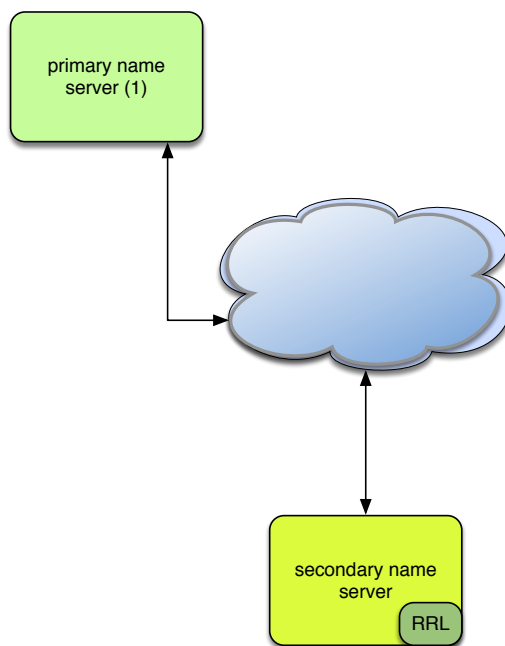


Figure 16.12: secondary name server with RRL

configuration example of RRL

```
# If YADIFA has been compiled with the Response Rate Limiter (default)
<rrl>
  # enable the RRL
  enabled                true

  # don't actually limit the response rate, only log what the filter
  # would do
  log-only                false

  # how many responses per second are allowed for a client
  # (masked with the prefix)
  responses-per-second 5

  # how many errors per second are allowed for a client
  # (masked with the prefix)
  errors-per-second    5

  # window of time in which the rates are measured, expressed in seconds
  window                15

  # every "slip" dropped answers, a truncated answer may randomly be
  # given so the client can ask again using TCP
  slip                  2

  # the min size of the table storing clients(masked with the prefix)
  min-table-size       1024

  # the max size of the table storing clients(masked with the prefix)
  max-table-size       16384

  # IPv4 clients are masked with this prefix
  ipv4-prefix-length   24

  # IPv6 clients are masked with this prefix
  ipv6-prefix-length   56

  # the list of IP/networks (Access Control List) not impacted by
  # the RRL
  exempted              none
</rrl>

<zone>
  domain                somedomain.eu
  file                  "slaves/somedomain.eu."
  type                  "slave"
  master                192.0.2.1
</zone>
```

17 TROUBLESHOOTING

By default *YADIFA* logs everything on the standard output. Warnings or errors may point to the issue. When configuring the logging to suit your needs, it is recommended one keeps the levels: warning, err, crit, alert and emerg for everything but the queries.

17.1 *Submitting a bug report*

If you are unable to fix the issue yourself, you can submit a bug report to the *YADIFA* team. For critical issues (i.e.: crash), please use bugreport@yadifa.eu. For any other issue or question, you can use yadifa-users@mailinglists.yadifa.eu.

The report should contain:

- The operating system type and version
- The version of *YADIFA* and how it was installed.
 - If you configured it yourself : the *./configure* parameters
 - If you used a package : where from and what version
- What machine is it running on
- All the log output, preferrably with all levels enabled (* or any in the configuration file).
- If you know them : the steps to reproduce the issue
- If possible, the zone files and as much of the configuration file you can give (i.e.: everything but the TSIG keys)

Please find enclosed two small scripts you can run on the server to retrieve most of the information we need.

Information about the system (the called programs are not always available):

```
script
```

```
#!/bin/sh

# basic system information
echo uname:
echo -----
uname -a
# OS
cat /etc/lsb_release
cat /etc/redhat-release
cat /etc/slackware-version
cat /etc/os-release
cat /etc/defaults/pcbsd
cat /etc/defaults/trueos
echo mount:
echo -----
mount
# available disk space
echo df:
echo ---
df -h

# available memory space
echo free:
echo -----
free -h
```

Information about the hardware:

```
script
```

```
#!/bin/sh
# various hardware information

echo lscpu:
echo -----
lscpu

echo lspci:
echo -----
lspci

echo lshw:
echo -----
lshw

echo hwinfo:
echo -----
hwinfo

echo lsscsi:
echo -----
lsscsi

echo lsusb:
echo -----
lsusb

echo lsblk:
echo -----
lsblk

echo pciconf:
echo -----
pciconf -lvcb
```

Please find enclosed a small script you can run on the build machine to retrieve information about the compiler:

```
script
```

```
#!/bin/sh

# compiler info (if you compiled yadifad yourself)
# to run on the build machine

echo gcc:
echo ----
gcc -v -v
gcc -dM -E - < /dev/null

echo clang:
echo -----
clang -v -v
clang -dM -E - < /dev/null
```

17.2 Stacktrace

In case of a crash, generating a stacktrace at the time of the problem arises may help to understand the issue. Please note that it is best to do this with the debug symbols for the package installed or with a binary that has not been stripped.

To generate the stacktrace, you can either use a generated core dump, or run yadifad in the debugger.

Please note that the way to enable unlimited-size core dumps varies with your OS flavor. On some linux, you can get its location by executing:

```
shell
```

```
$ cat /proc/sys/kernel/core_pattern
```

And enable it typing, as root:

```
shell
```

```
$ ulimit -c unlimited
```

Be sure the command worked:


```
shell
```

```
$ ulimit -c
```

Should print:

```
shell output
```

```
unlimited
```

17.2.1 Using a core dump

With a core dump at hand, you can start the debugger like this:

```
gdb /path-to-yadifad/yadifad /path-to-yadifad-core-dump/yadifad-core-dump-file
```

For example:

```
shell
```

```
$ gdb /usr/local/sbin/yadifad /var/cache/abrt/yadifad.core
```

Then on the debugger prompt:

```
gdb
```

```
set logging file /tmp/yadifad-stacktrace.txt  
set logging on  
thread apply all bt
```

You can keep pressing the [enter] key until you are back to an empty (gdb) prompt

```
gdb
```

```
quit
```

The file `/tmp/yadifad-stacktrace.txt` will contain the stacktraces.

17.2.2 Running yadifad in the debugger

You can start the debugger like this:

```
gdb /path-to-yadifad/yadifad
```

```
shell
```

```
$ gdb /usr/local/sbin/yadifad
```

Or, if yadifad is already running, like this:

```
gdb -p yadifad-pid
```

```
shell
```

```
$ gdb -p 12345
```

Then on the debugger prompt:

```
gdb
```

```
handle SIGUSR1 noprint pass
handle SIGUSR2 noprint pass
handle SIGTERM noprint pass
handle SIGINT noprint pass
handle SIGPIPE noprint pass
handle SIGHUP noprint pass
handle SIG33 noprint pass
set follow-fork-mode child
run
```

When the debugger stops with an error (i.e.: SIGSEGV, SIGABRT):

```
gdb
```

```
set logging file /tmp/yadifad-stacktrace.txt
set logging on
thread apply all bt
```

You can keep pressing the [enter] key until you get an empty (gdb) prompt.

```
gdb
```

```
quit
```

The file `/tmp/yadifad-stacktrace.txt` will contain the stacktraces.

17.3 *Building yadifad with even more debugging information*

When preparing to build yadifad, there are `./configure` options that increase the debugging information available.

The stacktrace information in the logs can be improved using `-enable-bfd-debug`. The cost of this option can be considered negligible.

Please note that although very useful in some cases, the mutexes monitoring feature (enabled using `-enable-mutex-debug`) is extremely expensive and should only be used in very specific cases.

In order to enable more debugging information, the make target “debug” greatly increases logging and activates many runtime checks. All internal libraries must be compiled with the same target so start from a clean source.

```
shell
```

```
$ make clean
```

```
$ make debug
```

```
$ sudo make install
```

Note that this kind of build may generate extremely huge log files. The increased logging is still subject to the settings in `yadifad.conf` so it is still possible to tune the flow.

Bibliography

- [1] Paul Vixie / O. Gudmundsson / D. Eastlake 3rd / B. Wellington. *Secret Key Transaction Authentication for DNS (TSIG)*, May 2000. **RFC 2845**.
- [2] D. Eastlake 3rd. *DNS Request and Transaction Signatures (SIG(0)s)*, September 2000. **RFC 2931**.
- [3] D. Eastlake 3rd. *RSA/SHA-1 SIGs and RSA KEYS in the Domain Name System (DNS)*, May 2001. **RFC 3110**.
- [4] D. Eastlake 3rd. *Domain Name System (DNS) IANA Considerations*, April 2013. **RFC 6895**.
- [5] J. Abley. *Resource Records for EUI-48 and EUI-64 Addresses in the DNS*, October 2013. **RFC 7043**.
- [6] R. Allbery. *DNS SRV Resource Records for AFS*, April 2010. **RFC 5864**.
- [7] C. Allocchio. *Using the Internet DNS to Distribute MIXER Conformant Global Address Mapping (MCGAM)*, January 1998. **RFC 2163**.
- [8] R. Atkinson. *Key Exchange Delegation Record for the DNS*, November 1997. **RFC 2230**.
- [9] R. Austein. *DNS Name Server Identifier (NSID) Option*, August 2007. **RFC 5001**.
- [10] C. Farrell / M. Schulze / S. Pleitner / D. Baldoni. *DNS Encoding of Geographical Location*, November 1994. **RFC 1712**.
- [11] W. Kumari / O. Gudmundsson / G. Barwood. *Automating DNSSEC Delegation Trust Maintenance*, September 2014. **RFC 7344**.
- [12] B. Laurie / G. Sisson / R. Arends / D. Blacka. *DNS Security (DNSSEC) Hashed Authenticated Denial of Existence*, March 2008. **RFC 5155**.
- [13] Paul Vixie / S. Thomson / Y. Rekhter / J. Bound. *Dynamic Updates in the Domain Name System (DNS UPDATE)*, April 1997. **RFC 2136**.
- [14] S. Jiang / D. Conrad / B. Carpenter. *Moving A6 to Historic Status*, March 2012. **RFC 6563**.
- [15] B. Manning / R. Colella. *DNS NSAP Resource Records*, July 1992. **RFC 1348**.
- [16] B. Manning / R. Colella. *DNS NSAP Resource Records*, October 1994. **RFC 1706**.
- [17] B. Manning / R. Colella. *DNS NSAP Resource Records*, June 1994. **RFC 1637**.

- [18] 3rd D. Eastlake. *Secret Key Establishment for DNS (TKEY RR)*, September 2000. **RFC 2930**.
- [19] M. Mealling / R. Daniel. *The Naming Authority Pointer (NAPTR) DNS Resource Record*, September 2000. **RFC 2915**.
- [20] C. Davis / Paul Vixie / T. Goodwin / I. Dickinson. *A Means for Expressing Location Information in the Domain Name System*, January 1996. **RFC 1876**.
- [21] Ed. E. Lewis / A. Hoenes. *DNS Zone Transfer Protocol (AXFR)*, June 2010. **RFC 5936**.
- [22] D. Eastlake. *Domain Name System Security Extensions*, March 1999. **RFC 2535**.
- [23] D. EastLake. *DSA KEYS and SIGs in the Domain Name System (DNS)*, March 1999. **RFC 2536**.
- [24] D. Eastlake. *RSA/MD5 KEYS and SIGs in the Domain Name System (DNS)*, March 1999. **RFC 2537**.
- [25] D. Eastlake. *Storage of Diffie-Hellman Keys in the Domain Name System (DNS)*, March 1999. **RFC 2539**.
- [26] A. Gulbrandsen / Paul Vixie / L. Esibov. *A DNS RR for specifying the location of services (DNS SRV)*, February 2000. **RFC 2782**.
- [27] J. Schlyter / W. Griffin. *Using DNS to Securely Publish Secure Shell (SSH) Key Fingerprints*, January 2006. **RFC 4255**.
- [28] O. Gudmundsson. *DNSSEC and IPv6 A6 aware server/resolver message size requirements*, December 2001. **RFC 3226**.
- [29] O. Gudmundsson. *Delegation Signer (DS) Resource Record (RR)*, December 2003. **RFC 3658**.
- [30] M. Stapp / T. Lemon / A. Gustafsson. *DNS Resource Record (RR) for Encoding Dynamic Host Configuration Protocol (DHCP) Information (DHCID RR)*, October 2006. **RFC 4701**.
- [31] S. Kwan / P. Garg / J. Gilroy / L. Esibov / J. Westhead / R. Hall. *Secret Key Transaction Authentication for DNS (GSS-TSIG)*, October 2003. **RFC 3645**.
- [32] W. Hardaker. *Child-to-Parent Synchronization in DNS*, March 2015. **RFC 7477**.
- [33] M. Crawford / C. Huitema. *DNS Extensions to Support IPv6 Address Aggregation and Renumbering*, July 2000. **RFC 2874**.
- [34] S. Josefsson. *Base-N Encodings*, October 2006. **RFC 4648**.
- [35] S. Josefsson. *Storing Certificates in the Domain Name System (DNS)*, March 2006. **RFC 4398**.
- [36] S. Kitterman. *Sender Policy Framework (SPF) for Authorizing Use of Domains in Email, Version 1*, April 2014. **RFC 7208**.
- [37] P. Koch. *A DNS RR Type for Lists of Address Prefixes (APL RR)*, June 2001. **RFC 3123**.

- [38] P. Nikander / J. Laganier. *Host Identity Protocol (HIP) Domain Name System (DNS) Extension*, April 2008. **RFC 5205**.
- [39] M. Mealling. *Dynamic Delegation Discovery System (DDDS)*, October 2002. **RFC 3403**.
- [40] R. Daniel / M. Mealling. *Resolution of Uniform Resource Identifiers using the Domain Name System*, June 1997. **RFC 2168**.
- [41] Paul Mockapetris. *DOMAIN NAMES - CONCEPTS AND FACILITIES*, November 1987. **RFC 1034**.
- [42] Paul Mockapetris. *DOMAIN NAMES - IMPLEMENTATION AND SPECIFICATION*, November 1987. **RFC 1035**.
- [43] M. Ohta. *Incremental Zone Transfer in DNS*, August 1996. **RFC 1995**.
- [44] John Postel. *USER DATAGRAM PROTOCOL*, Augustus 1980. **RFC 768**.
- [45] John Postel. *TRANSMISSION CONTROL PROTOCOL*, September 1981. **RFC 793**.
- [46] M. Richardson. *A Method for Storing IPsec Keying Material in DNS*, February 2005. **RFC 4025**.
- [47] R. Arends / R. Austein / M. Larson / D. Massey / S. Rose. *DNS Security Introduction and Requirements*, March 2005. **RFC 4033**.
- [48] R. Arends / R. Austein / M. Larson / D. Massey / S. Rose. *Resource Records for the DNS Security Extensions*, March 2005. **RFC 4034**.
- [49] RJ Atkinson / SN Bhatti / S. Rose. *DNS Resource Records for the Identifier-Locator Network Protocol (ILNP)*, November 2012. **RFC 6742**.
- [50] P. Hoffman / J. Schlyter. *The DNS-Based Authentication of Named Entities (DANE) Transport Layer Security (TLS) Protocol: TLSA*, August 2012. **RFC 6698**.
- [51] S. Thomson / C. Huitema / V. Ksinant / M. Souissi. *DNS Extensions to Support IP Version 6*, October 2003. **RFC 3596**.
- [52] P. Hallam-Baker / R. Stradling. *DNS Certification Authority Authorization (CAA) Resource Record*, January 2013. **RFC 6844**.
- [53] C. Everhart / L. Mamakos / R. Ullmann. *New DNS RR Definitions*, October 1990. **RFC 1183**.
- [54] J. Damas / M. Graff / Paul Vixie. *Extension Mechanisms for DNS (EDNS(0))*, April 2013. **RFC 6891**.
- [55] Paul Vixie. *Extension Mechanisms for DNS (EDNS0)*, August 1999. **RFC 2671**.
- [56] M. Andrews / S. Weiler. *The DNSSEC Lookaside Validation (DLV) DNS Resource Record*, February 2006. **RFC 4431**.
- [57] S. Weiler. *Legacy Resolver Compatibility for Delegation Signer (DS)*, May 2004. **RFC 3755**.

[58] B. Wellington. *Domain Name System Security (DNSSEC) Signing Authority*, November 2000. **RFC 3008**.

[59] S. Rose / W. Wijngaards. *DNAME Redirection in the DNS*, June 2012. **RFC 6672**.

Index

AXFR, 9, 28, 64, 66, 68, 69, 95

command

bin

configure, 16, 30

kill, 26

make, 16, 30

make install, 16, 30

yadifa, 15, 30

sbin

yadifad, 15, 30

configuration

activate, 83

algorithm, 71, 84

allow-control, 64, 68

allow-notify, 64, 68

allow-query, 64, 68

allow-transfer, 64, 68

allow-update, 64, 68

allow-update-forwarding, 64, 68

also-notify, 69

answer-formerr-packets, 64

auto-notify, 69

axfr-compress-packets, 64

axfr-max-packet-size, 64

axfr-max-record-by-packet, 64

axfr-retry-delay, 64

axfr-retry-jitter, 64

chroot, 64

chroot-path, 64

config-file, 65

cpu-count-override, 65

create, 83

daemon, 65

data-path, 65

database, 77

delete, 83

denial, 81

description, 81

dnssec, 77

dnssec-mode, 68

dnssec-policy, 68

dnssec-thread-count, 65

domain, 68

drop-before-load, 68

edns0-max-size, 65

file-name, 68

gid, 65

hostname-chaos, 65

id, 81–85

inactive, 83

iterations, 85

journal-size-kb, 68

key-roll, 82

key-suite, 81

key-template, 82

keys-path, 65, 68

ksk, 84

listen, 65

log-from-start, 65

log-path, 65

log-unprocessable, 65

maintain-dnssec, 68

masters, 68

max-tcp-connections, 65

max-tcp-queries, 65

multimaster-retries, 69

name, 71

no-master-updates, 69

notifies, 69

notify, 69

notify-auto, 69

notify-retry-count, 69

notify-retry-period, 69

notify-retry-period-increase, 69

nsid

ascii, 79

hex, 79

optout, 85

pid-file, 65

- port, 66
- publish, 83
- queries, 77
- queries-log-type, 65
- retry-count, 69
- retry-period, 69
- retry-period-increase, 69
- rri
 - enabled, 80
 - errors-per-second, 80
 - exempt-clients, 80
 - ipv4-prefix-length, 80
 - ipv6-prefix-length, 80
 - log-only, 80
 - max-table-size, 80
 - min-table-size, 80
 - responses-per-second, 80
 - slip, 80
 - window, 80
- salt, 85
- salt-length, 85
- secret, 71
- server, 77
- server-port, 66
- serverid-chaos, 65
- sig-signing-type, 66
- sig-validity-interval, 66, 69
- sig-validity-jitter, 66, 69
- sig-validity-regeneration, 66, 69
- size, 84
- statistics, 66, 77
- statistics-max-period, 66
- system, 77
- tcp-query-min-rate, 66
- thread-count-by-address, 66
- true-multimaster, 69
- type, 69
- uid, 66
- version-chaos, 66
- xfr-connect-timeout, 66
- xfr-path, 66
- zone, 77
- zone-download-thread-count, 66
- zone-load-thread-count, 66
- configuration file
 - yadifad.conf, 31
 - yadifad.conf.example, 15
- CPU, 13
- Denial of Service, 56
- Distributed Denial of Service, 56
- DNS, 10, 39, 40, 54–58, 64, 66, 94, 95
- DNS Name Server Identifier Option, 79
- DNS Name Server Identifier Option (NSID), 79
- DNSSEC, 9, 13, 39–42, 45, 46, 51, 57, 63, 65, 68, 77
- dnssec-policy, 24, 46
- EDNS0, 9, 65
- encodings
 - BASE16, 48
- firm
 - EURid, 9, 10
- IXFR, 9, 28, 64, 66, 68, 95
- library
 - dnsscore, 15
 - dnsdb, 15
 - dnslg, 15
 - dnszone, 15
- man
 - yadifa.8, 15
 - yadifa.rc.5, 15
 - yadifad.8, 15
 - yadifad.conf.5, 15
- resource record, 10, 11, 48, 54, 89
- resource record type
 - DNSKEY, 40, 41, 43, 44
 - DS, 40, 44, 85
 - NS, 10, 69
 - NSEC, 9, 44, 45, 48, 77, 81
 - NSEC3, 9, 44, 45, 47, 48, 51, 77, 81, 85
 - NSEC3PARAM, 45, 48
 - RRSIG, 40, 43–45, 48, 68
 - SOA, 11
- Response Rate Limiting, 57, 80, 94, 96
- rfc, 9, 28
 - 1034, 86
 - 1035, 86, 89, 91
 - 1183, 89
 - 1348, 89
 - 1637, 89
 - 1706, 89
 - 1712, 90

1876, 90
 1995, 91
 2163, 90
 2168, 90
 2230, 90
 2535, 89, 90
 2536, 89, 90
 2537, 89, 90
 2539, 90
 2782, 90
 2845, 91
 2874, 90
 2915, 90
 2930, 91
 2931, 89
 3008, 89, 90
 3110, 89, 90
 3123, 90
 3225, 90
 3226, 90
 3403, 90
 3596, 90
 3658, 90
 3755, 89, 90
 4025, 90
 4034, 41, 89, 90
 4255, 90
 4398, 90
 4431, 91
 4701, 90
 5155, 41, 90
 5205, 90
 5702, 41
 5864, 89
 5936, 91
 6563, 90
 6672, 90
 6698, 90
 6742, 91
 6844, 91
 6891, 90
 6895, 91
 7043, 91
 7208, 91
 7344, 90
 7477, 90
 dns notify, 69
 dns update, 28, 32, 36, 59

FQDN, 63, 79
 KSK, 41–44, 47, 49, 50, 84
 NSID, 54
 SEP, 43, 44
 TCP, 30, 57, 65, 66, 79, 94, 95
 TSIG, 25, 30, 79
 UDP, 56, 57, 79, 94
 ZSK, 41–44, 47, 49, 50, 84

section

acl, 24, 60, 63, 72
 channels, 24, 25, 60
 denial, 25, 46–49, 61, 81, 82, 85
 dnssec-policy, 24, 25, 46–48, 51, 60
 key, 24, 25, 60
 key-roll, 25, 46, 52, 53, 61, 82
 key-suite, 24, 46, 47, 49, 60, 81, 82
 key-template, 25, 46, 50, 61, 82
 keyword
 activate, 52
 algorithm, 50
 allow-control, 31
 create, 52
 data-path, 68
 delete, 52
 denial, 46
 dnssec-policy, 46
 errors-per-second, 57
 generate, 52
 id, 46, 47, 49, 52, 53, 81–85
 inactive, 52
 ipv4-prefix-length, 57
 ipv6-prefix-length, 57
 iterations, 47, 48
 key-roll, 49
 key-suite, 46, 47, 51
 key-template, 49
 master, 69
 masters, 58, 59
 max-table-size, 57
 min-table-size, 57
 optout, 48
 publish, 52
 responses-per-second, 57
 salt, 47–49, 85
 salt-length, 47–49, 85
 salt-length's, 49
 section-key-roll, 83

- section-key-template, 84
- size, 50
- slave, 69
- slip, 57
- true-multimaster, 58, 59
- window, 57
- loggers, 24, 25, 60
- main, 24, 25, 31, 60, 68, 69
- nsid, 24, 25, 60
- rrl, 24, 25, 60
- zone, 24, 25, 46, 59, 60
- software
 - YADIFA, 9, 14–16, 18, 19, 21–26, 30, 47, 65, 66, 68, 69, 78–80, 89, 92–94, 117
- TLD, 40